

# NOVALINK

## Lighting Control Panels with Soft-Patch

- 24 and 36 fader control panels
- 24 channel model patches to 512 DMX channels
- 36 channel model patches to 1024 DMX channels
- 80 Scenemasters for playback of autofade scenes, chases and shows
- SD card backup of patch list and scene levels



TheatreLight New Zealand  
email: [info@theatrelight.co.nz](mailto:info@theatrelight.co.nz)  
web: [www.theatrelight.co.nz](http://www.theatrelight.co.nz)

**THEATRELIGHT NZ**  
of New Zealand


## Memory Lighting Consoles

# NOVALINK

The NovaLink 24 and 36 control panels feature a Soft-Patch added to Theatrelight's original Nova 24 and 36 desks. The soft-patch allows driving the large number of DMX channels demanded by LED luminaires. The softpatch of the 24 channel model can drive up to 512 DMX channels at different levels- up to 1024 DMX channels for the Novalink 36. The NovaLink can record scenes and chases with variable fade times and chase speeds, and complete shows. Easy to learn and operate, the desk is an ideal control panel for Schools, Theatres, and Drama and TV studios. The Bass and Chase features also make the NovaLink ideal for Events and Club lighting.

### FEATURES

- ! Available in 24 or 36 channel models
- ! Soft-patch to 512 or 1024 DMX channels
- ! LCD display and keyboard for patch list set-up
- ! Two preset manual desk emulation with auto-timed dipless cross-fade
- ! 80 paged submasters, each of which can record a scene, a chase, or an autofade show
- ! Sound-to-Light with Bass chase options
- ! Remote step and external audio inputs
- ! Library backup to SD Card (supplied)
- ! 5 year memory retention during power off
- ! Dust guard protection on all faders
- ! Standard DMX-512 USITT 1990 outputs

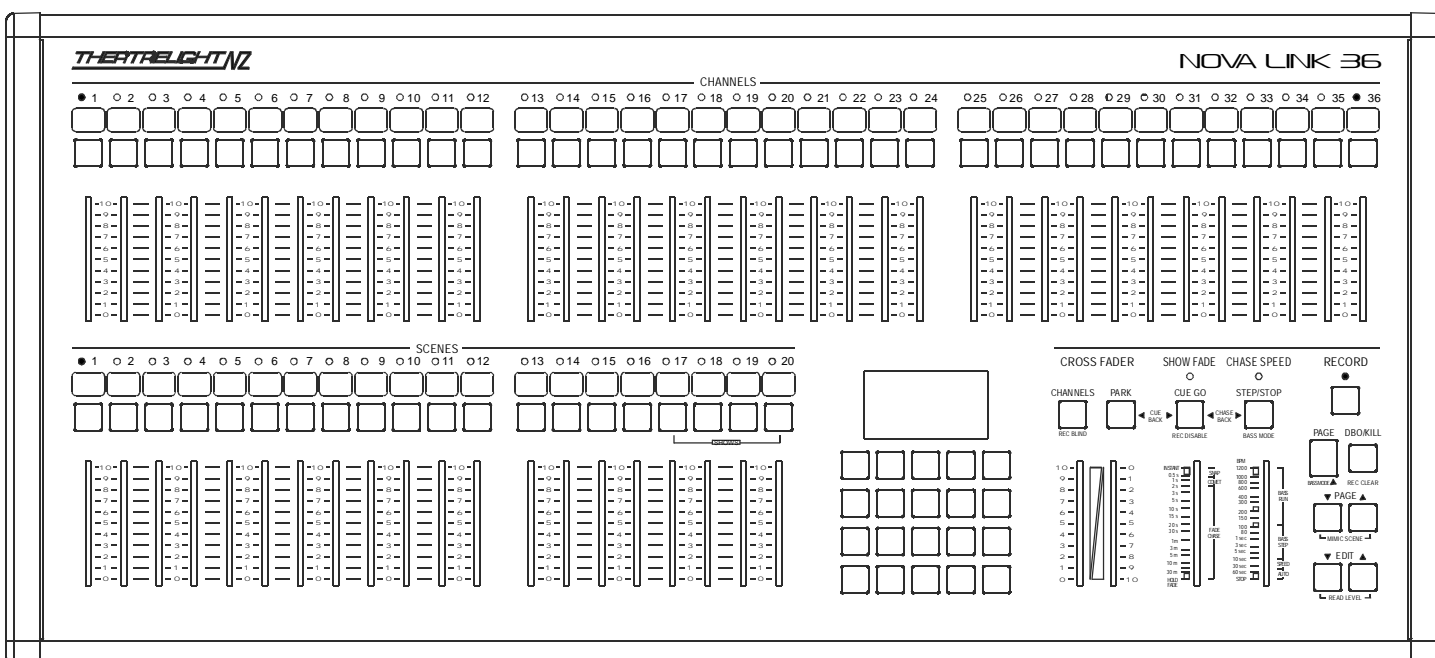

### Specifications

**Construction:** Powder coated corrosion protected steel frame

**Faders:** 60mm stroke linear faders with custom molded ABS knobs

**Flash Keys:** Long life heavy duty computer keys with ABS caps

**Electronics:** CMOS micro-processor with 5 year lithium backup battery, CMOS memory

**Backup:** SD card for secure backup of all scene and patch levels

**Power Supply:** 100~120 or 220~240VAC with IEC mains power lead

**Control Output:** Dual DMX-512 USITT (1990) outputs via 5 pin XLR male sockets


**Remote Step Control:** Cue Go, Cue Back and Show Reset via 6.25mm stereo jack socket (short to earth)

**Internal Microphone:** Omni-directional Electret Microphone

**External Audio Input:** 6.3mm mono jack, 0db level

### Dimensions

Model	Length	Weight
NovaLink 24	535mm	6Kg
NovaLink 36	773mm	9Kg

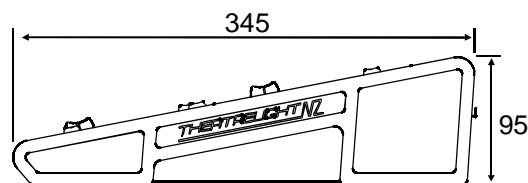

Your Local Distributor:



## THEATRELIGHT NZ

Theatrelight NZ, 6 Rowe St. Onehunga, Auckland, New Zealand

Tel: 64-9-622 1187, Fax: 64-9-636 5803

Internet: [www.theatrelight.co.nz](http://www.theatrelight.co.nz), e-mail: [info@theatrelight.co.nz](mailto:info@theatrelight.co.nz)