



LED FESTOON LIGHTS SPECIFICATION & INSTALLATION



Beautiful. Safe. Reliable.

Designed in Australia with love by lighting designer Heath Williamson, Firefly Festoon lighting faithfully recreates a traditional look without the headache of constantly changing bulbs or the need to worry about broken glass or risk using high voltage. This will keep your workplace health & safety and insurance happy!


The Firefly LED Festoon light system runs off a safe 24volt AC or DC transformer using non-breakable bulbs that are inexpensive to run and virtually maintenance free.

Heath not only wants the lights to look like fantastic traditional bulbs, but also wants them to be a wonderful practical light source.

The warm white colour temperature produced makes food look delicious and Heath personally checks each batch of LED's before production ensuring both consistent and accurate colours.

The Firefly Festoon lighting system has a proven track record in the extreme conditions of Australia with its relentless sun, wild storms and even wilder music festivals.

Our festoons have been lighting up our famous beaches, top restaurants, night clubs, funky signage, bars, theme parks, TV sets and shopping malls. Even the Australian Navy use our lights to decorate their war ships.

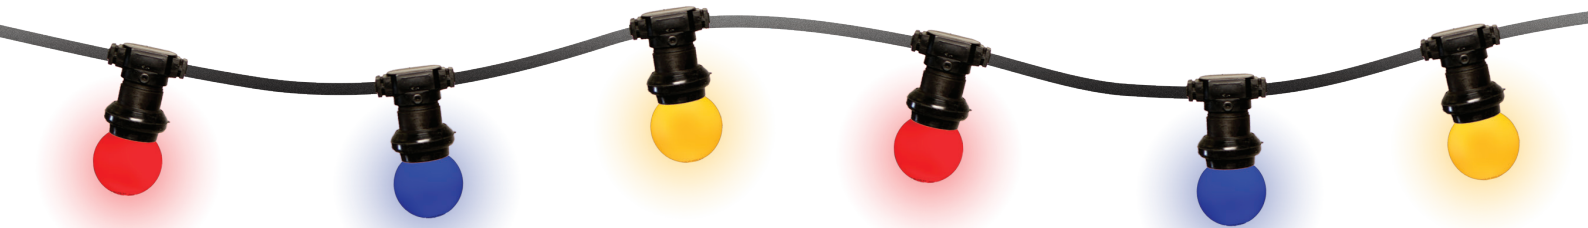

Cable

We sell the cable by the metre in various lamp spacing's of 15cm, 20cm, 40cm, 50cm, 90cm and 1.5m (50cm is the most popular). Our self-leveling, heavy-duty cable is designed for permanent installations and the rigors of repeated hire use.

Each lamp holder is factory moulded with a weatherproof flange, protecting the lamps from even the most extreme weather conditions.

A support cable is only required when your cable run exceeds 10m / 30ft.

To avoid voltage drop out, do not exceed more than 40m / 130ft in one continuous run. Do not run more than 10m / 30ft of feeder cable between transformer and start of light strings.

Transformers

Our weatherproof IP rated transformers are available with a flex and plug, ready to plug or play, or are available in a hardwired version.

240volt to 24volt AC IP67 transformer with flex plug available in 100, 200, 300 & 400watts.

240volt to 24volt AC IP66 surface mounted hardwired transformer available in 100, 200 & 300watts.

100volt > 240volt to 24volt DC Meanwell brand IP67 LED drivers with flex and plug available in 30watt (IP64), 80, 100, 1500 & 240watts.



Indoor
Use



Outdoor
Use



UV
Resistant



Extra Low
Voltage



C-Tick
n27064



Green
Friendly



Designed in
Australia



FIREFLY 24VOLT AC/DC LED BULB RANGE



WARM WHITE FILAMENT
Equivalent to 10w Clear
Incandescent ES Fancy Round
dimmed at 20% (Golden colour)

CLEAR CAP
24VOLT AC/DC 0.5 WATT
6 LED 2200 KELVIN
21.1 LUMEN OUTPUT (LM)
FLB-G45-6LED-24V-E27-CL-GWW



WARM WHITE FILAMENT
Equivalent to 15w Clear
Incandescent ES Fancy Round
dimmed at 20% (Golden colour)

CLEAR CAP
24VOLT AC/DC 1 WATT
12 LED 2200 KELVIN
39.8 LUMEN OUTPUT (LM)
FLB-G45-12LED-24V-E27-CL-GWW



WARM WHITE PEARL
Equivalent to 25w Incandescent
Milky White ES Fancy Round
dimmed at 20%

MILKY PEARL CAP
24VOLT AC/DC 1.5 WATT
21 SMD LED 2030 KELVIN
68.4 LUMEN OUTPUT (LM)
FLB-G45-21SMD-24V-E27-WP-WW



COOL WHITE PEARL
Equivalent to 25w Incandescent
(Cool White) Milky White
ES Fancy Round

MILKY PEARL CAP
24VOLT AC/DC 1.5 WATT
21 SMD LED 5664 KELVIN
70.2 LUMEN OUTPUT (LM)
FLB-G45-21SMD-24V-E27-WP-CW



RED G45
Equivalent to 40w Red
Incandescent ES Fancy Round

RED SOLID COLOUR CAP
24VOLT AC/DC 1.5 WATT
21 SMD LED 150 KELVIN
11.7 LUMEN OUTPUT (LM)
FLB-G45-21SMD-24V-E27-SC-R



BLUE G45
Equivalent to 40w Blue
Incandescent ES Fancy Round

BLUE SOLID COLOUR CAP
24VOLT AC/DC 1.5 WATT
21 SMD LED 100000 KELVIN
11.6 LUMEN OUTPUT (LM)
FLB-G45-21SMD-24V-E27-SC-B



YELLOW G45
Equivalent to 40w Yellow
Incandescent ES Fancy Round

YELLOW SOLID COLOUR CAP
24VOLT AC/DC 1.5 WATT
21 SMD LED 1506 KELVIN
17.9 LUMEN OUTPUT (LM)
FLB-G45-21SMD-24V-E27-SC-Y



GREEN G45
Equivalent to 40w Green
Incandescent ES Fancy Round

GREEN SOLID COLOUR CAP
24VOLT AC/DC 1.5 WATT
21 SMD LED 8498 KELVIN
53.3 LUMEN OUTPUT (LM)
FLB-G45-21SMD-24V-E27-SC-G



MAGENTA PINK G45
Equivalent to 40w Pink
Incandescent ES Fancy Round

PINK SOLID COLOUR CAP
24VOLT AC/DC 1.5 WATT
21 SMD LED 150 KELVIN
11.7 LUMEN OUTPUT (LM)
FLB-G45-21SMD-24V-E27-SC-P




ORANGE G45
Equivalent to 40w Orange
Incandescent ES Fancy Round

ORANGE SOLID COLOUR CAP
24VOLT AC/DC 1.5 WATT
21 SMD LED 1500 KELVIN
8.111 LUMEN OUTPUT (LM)
FLB-G45-21SMD-24V-E27-SC-O



GLITTER STROBE
Equivalent to a Zenon 'random'
ES Strobe Bulb

CLEAR CAP
24VOLT AC/DC 3 WATT
LED 11000-20000 KELVIN
1.5 LUMEN OUTPUT (LM)
FLB-STROBE-1-5F-24V-E27-CW



RGB OPTIONS AVAILABLE



THIS LED LIGHTING SYSTEM IS 24 VOLT AC OR DC EXTRA LOW VOLTAGE USE ONLY! NEVER CONNECT LIGHT STRING OR BULBS DIRECTLY TO 240 VOLT MAINS POWER WITHOUT CORRECT 240 VOLT TO 24 VOLT AC OR DC TRANSFORMER.

ALL ELECTRICAL HARDWIRING WORK SHOULD BE DONE BY QUALIFIED ELECTRICAL PROFESSIONALS.

DO NOT SUBMERGE LIGHT STRING IN WATER, USE WATERPROOF CONNECTORS FOR ALL OUTDOOR APPLICATIONS.



FOR EXTRA SAFETY WE RECOMMEND INSTALLING A FUSE ON THE EXTRA LOW VOLT SIDE BETWEEN LIGHT STRING & TRANSFORMER TO PROTECT AGAINST SHORT CIRCUIT. DO NOT USE LIGHTING STRING IF DAMAGED: SUCH AS BROKEN GLOBE, LOOSE CONNECTORS OR FRAYED WIRE INSTALLATION. DO NOT INSTALL THIS LIGHT STRING WHERE EXPOSED BARE CABLE CAN BE SHORTED OR CONTACT ANY CONDUCTIVE MATERIAL TO REDUCE THE RISK OF FIRE. INSPECT PERIODICALLY.

DO NOT SECURE LIGHT STRING WITH NAILS, STAPLES OR LIKE MEANS THAT MIGHT DAMAGE THE WIRE INSTALLATION.

Firefly
LIGHTING



Ordering is easy

Order here

1 How many metres do you require?

2

Pick the type and
colour bulbs you
would like
(See inside)

3

Pick spacing
between lamps
from 15, 20, 40, 50,
90cm or 1.5 metres.

4

Select a
transformer
(See inside)



The Firefly crew will be happy to answer any of your questions before ordering.
We keep large stocks, so most orders are ready for dispatch within two business days.

CALL (07) 3254 4333 | FAX (07) 3254 4555 | INFO@FIREFLYLIGHTING.COM.AU