


MULTICORE UNBREAKABLE MULTI-MODE FIBRE OPTIC CABLES

CVS LKFOHD*MM50-*

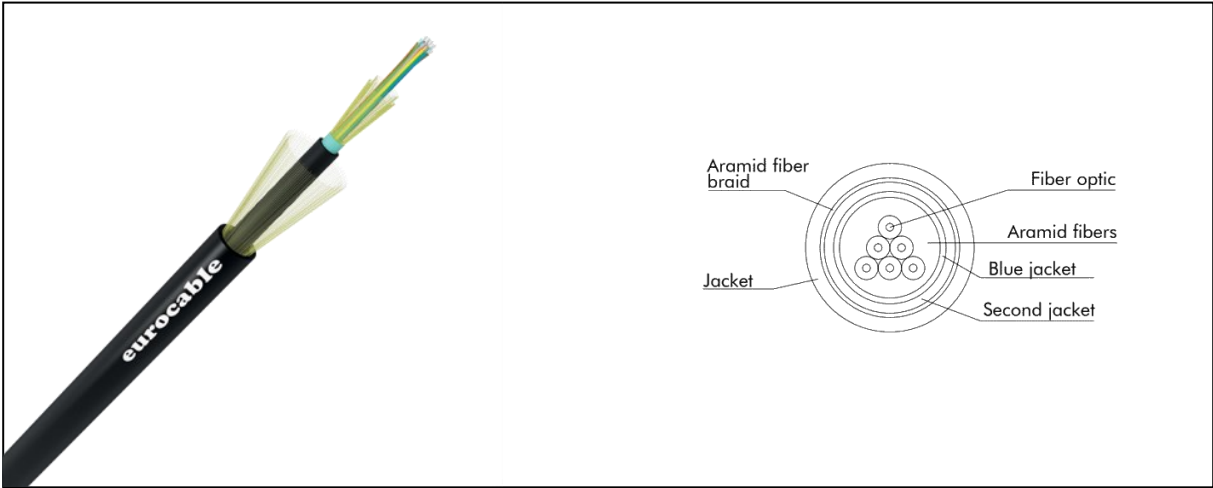

			CVS LKFOHD6MM50-5		CVS LKFOHD6MM50-7	
TECHNICAL DATA						
Attenuation			≤ 3 dB/Km at 850 nm			
			≤1.5 dB/Km at 1310 nm			
Operating temperature		Installation		-10° C +60° C		
		Operation		-10° C +60° C		
Minimum bending radius			2.5 cm			
Breaking load			2000 N		3000 N	
GENERAL DATA						
Cable		Fiber O.D.		0.255 mm		
		Cable O.D.		5.10 mm		7.10 mm
Jacket		Inner jacket	Material	LSZH compound		
			Color	Blue		
		Second jacket	Material	PVC		
			Color	Black		
		Outer jacket	Material	PUR		
			Color	Black		
Under jacket strength element			Aramid fiber braid			