

moody f10

Category

D) Lighting Controllers - moody wall panel

Description

Wall mount DALI & DMX dynamic effects panel controller for 10 zones of RGB with illuminated rotary control

60

Mechanical

- Housing: UK '1-Gang' Style Panel
- Fascia plate (buy separately): Compatible with 'Scolmore definity click' range
- Overall Dimensions: 86mm (H) x 86mm (W) x 40mm (D)
- Depth behind mounting: 15.2mm
- Mounting: UK '1-Gang' Back Box 35mm (supplied)
- Mounting screw centres: 60.6mm
- Mass: 0.11kg
- Country of Manufacture: United Kingdom

Power & Electrical

- Input Voltage: 9 to 24 VDC
- Input Connector: (1) 2-pin Screw Terminal DC Voltage Input
- 0.2-1.5mm² (30-16AWG) solid conductors
- 0.2-1.0mm² (30-16AWG) stranded conductors
- Input Power (max): 500mW

Environmental

- Operating Temperature: 0°C to 40°C
- Storage Temperature: -10°C to +50°C
- Operating Relative Humidity (max): 80% Non-Condensing
- IP Rating: IP20 Indoor Use Only
- Certification: CE, WEEE, RoHS
- Warranty: 2 Year (Return to Base)

User Interface / Indication

- (1) Rotary dial for overall intensity control with push on/off
- LED indication: shows overall intensity and real-time colour of Zone 1

Control / Isolation

- Colour control: 30 DMX channels or 30 DALI consecutive short addresses
- Output Protocols: DMX512-A, DALI
- DMX Output connector: (1) 3-pin screw terminal
- 0.2-1.5mm² (30-16AWG) solid conductors
- 0.2-1.0mm² (30-16AWG) stranded conductors
- DMX Output: PSU referenced
- DALI Output connector: (1) 2-pin screw terminal
- 0.2-1.5mm² (30-16AWG) solid conductors
- 0.2-1.0mm² (30-16AWG) stranded conductors
- DALI Output isolation: 2kV Opto-isolated

Programming

- (1) Rotary dial with programming mode (enter/exit by holding down for 3 secs)
- Set the hue and saturation of the start colour and end colour for 10 independent zones
- Set the fade rate (same for all zones)
- (1) Rear jumper for programming inhibit

Package Contents

- moody f10
- Back Box


Ordering Info


Product Code: moody f10
Accessories (not included): PSU

Data Sheets



Mounting Drawing

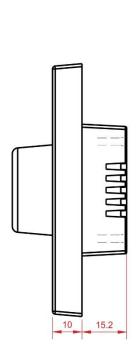

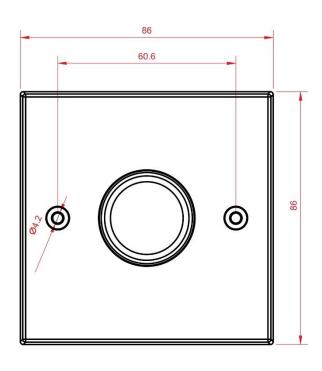

Application Drawing

moody i, x, y, z or f

DMX or DALI dimmer

CV dimming

White light
(moody i) or coloured feature lighting (moody x,y,z,f)

DC power




www.ArtisticLicence.com

Artistic Licence, The Mould Making Workshop Soby Mews, Bovey Tracey, TQ13 9JG, UK

Sales@ArtisticLicence.com Support@ArtisticLicence.com Tel: +44 (0) 20 8863 4515

Due to our policy of continuing product improvement specifications are subject to change without notice



Artistic Licence