

CELL130

- Designed to fit 32mm (1 1/4") to 35mm (1 3/8") truss tubes
- Precision extruded high tensile aluminium alloy
- Compatible with M222 truss series
- CE certified
- Polished surface with micro-percussion markings
- Rated with SF 8:1 (kg) DGVU17/BGV C1 (SWL1)
- Rated with SF 4:1 (kg) 2006/42/EC (SWL2)
- Interchangeable M10 screw ensures flexible attachment points
- Powder coated versions available on request
- Black anodized versions of CELL131/134 available



CELL131 / CELL 131|anodized

Basic clamp

	SWL1	SWL2	Weight	Tube Ø
kg (lbs)	160 (353)	330 (728)	0.10 (0.2)	32-35 mm (1.26"-1.38")


Basic Clamp can be used for most applications.

CELL132

Clamp with bolt and wingnut

	SWL1	SWL2	Weight	Tube Ø
kg (lbs)	160 (353)	330 (728)	0.25 (0.33)	32-35 mm (1.26"-1.38")

Clamp supplied with M10 x 30 bolt and wingnut.

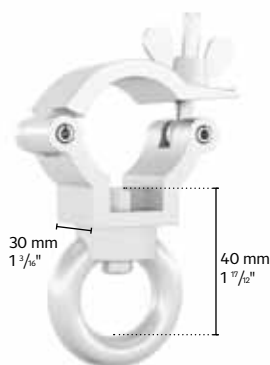


CELL133

Clamp with lifting eye

	SWL1	SWL2	Weight	Tube Ø
kg (lbs)	160 (353)	330 (728)	0.70 (1.54)	32-35 mm (1.26"-1.38")

Clamp with lifting eye

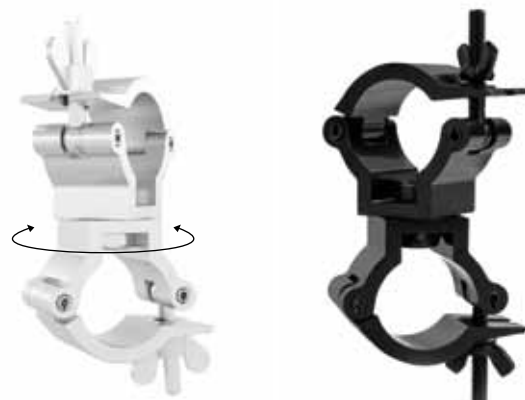

CELL134 / CELL134|anodized

Swivel coupler

	SWL1	SWL2	Weight	Tube Ø
kg (lbs)	160 (353)	330 (728)	0.80 (1.76)	32-35 mm (1.26"-1.38")

Set of two clamps free to rotate 360° for connection of two tubes.




CELL135

90° fixed coupler

	SWL1	SWL2	Weight	Tube Ø
kg	160 (353)	330 (728)	0.80 (1.76)	32-35 mm (1.26"-1.38")
lbs				

90° fixed coupler

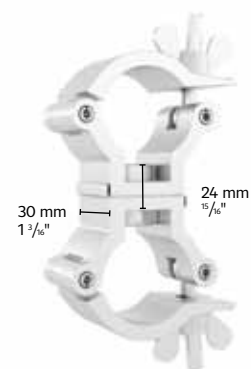


CELL136

Parallel coupler

	SWL1	SWL2	Weight	Tube Ø
kg	160 (353)	330 (728)	0.80 (1.76)	32-35 mm (1.26"-1.38")
lbs				

Set of two clamps fixed parallel to each other for connection of two tubes.

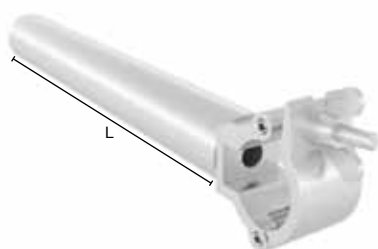

CELL143

Horizontal attachment

	L1	L2	L3	Tube Ø
mm	250 (9 53/64")	500 (19 43/64")	750 (29 33/64")	32-35 mm (1.26"-1.38")
in				

Tube 32x1.5mm also available in custom lengths.

