




I-CON wallbox is the JOINON solution for private and semi-public contexts, in compliance with the international standard IEC 61851-1 ed. 3. They are characterized by an elegant and compact design, for the special "one-hand recharge" functionality, and for the presence of the vandal-proof socket as an alternative to the connector with cable and holder integrated in the station, the IP55 degree combined with an IK10 certified resistance, intelligent load management, Backlight lighting, and various installation possibilities: wall, flush-mounting or floor.

<b>INPUT</b>		- Socket/Connector Nr. (Type)	1 (Type 2 connector with 5 mt. cable)
Terminal blocks	5 x 10 mm <sup>2</sup>	Charging activation	Locally managed, via RFID
Rated current	32 A	Human Interface	LED RGB + slide touch display
Total power	22 Kilowatt	Connectivity	No
<b>OUTPUT</b>		<b>MECHANICAL FACTS</b>	
Rated voltage	400 V	Mouting and installation	Wall mounting (floor mounting with support)
Current supplied (max)	32 A	Colour	Dark grey
Maximum current	22 Kilowatt	Material	Thermoplastic (Post-industrial origin)
Thermal-magnetic protection	Currently not present	External treatments	No
Type of residual current protection	Currently not present	IP degree	IP55
Power meter	YES (MID)	Mechanical resistance	IK10
DC Leakage check	Yes	Operating temperature	-25 +50 °C
(Auto)restart electrical protections	Currently not present	Customizations	No

## DIMENSIONAL

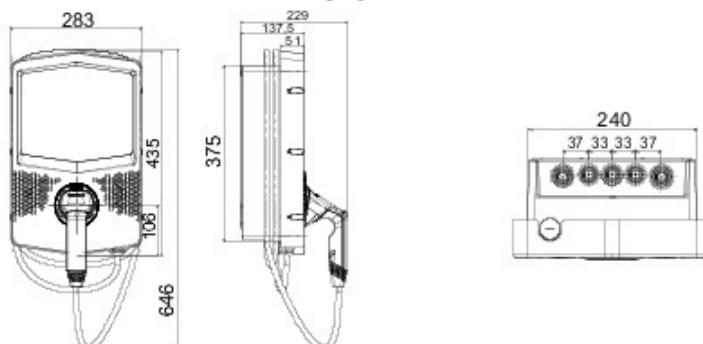

## TECHNICAL SYMBOLOGY

**IP**

IP55

**IK**

IK10

## STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 30/12/2021

Data, measures, designs and pictures are shown  
only as informative purposes,  
and could be changed without previous notice