

High-performance, tour-grade signal management solutions!



- One DMX input, 4 or 5 isolated outputs; DMX Thru on RDM models.
- Compact, durable Mini "Blue Box" tour-ready enclosure.
- For desktop use, or optional yoke for truss mounting.
- RackMount kits available, for single or double units.
- Full RDM functionality depending on model.
- Shock-mounted circuitry. Designed for extreme conditions and temperatures.
- Neutrik™ connectors: Locking PowerCON mains and XLR.
- Designed and built for working professionals in entertainment production.

BUILT TO LAST!

ProPlex - DATA DISTRIBUTION YOU CAN DEPEND ON



Worldwide Exclusive Distribution

sales@tmb.com

Los Angeles
+1 818.899.8818

London
+44 (0)20.8574.9700




tmb
www.tmb.com

New York
+1 201.896.8600

Beijing
+86 10.8492.1587

Toronto
+1 519.538.0888

Technical Specifications		
Model	Opto-Splitter Mini DMX only	Opto-Splitter Mini RDM
Part Number	PPDDS145MD	PPDDS145MR
DMX Inputs	1 XLR5 Male	1 XLR5 Male
DMX Outputs	5 isolated XLR5 Female	4 isolated + 1 Thru XLR5 Female
DMX Signal	DMX-512A	
RDM	No	Yes
Additional Features		DMX Termination Switch
Signal Delay	THRU mode: < 0.1µsec	REGENERATION mode: 2µsec
DMX Isolation	Optical to 1000V	
Power	100-230 VAC, 50-60 Hz (consumption 15W)	
Mains Connector	Neutrik™ powerCON NAC3MPA	
Fuse	2A, 250V	
Cooling	Convection	
Operating Temperature	-4° to +104° F (-20° to +40° C)	
Operating Humidity	10 - 85%	
Unit Dimensions (WxHxD) w/ yoke	7.7 x 3.6 x 8.74 in (196 x 92 x 222 mm)	
Unit Weight (unpacked)	4.7 lbs (2.1 kg)	
Packed Dimensions (WxHxD)	11.8 x 4.2 x 9.4 in (300 x 106 x 240 mm)	
Shipping Weight	5 lbs (2 kg)	

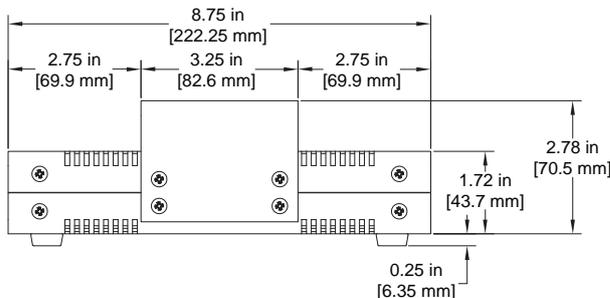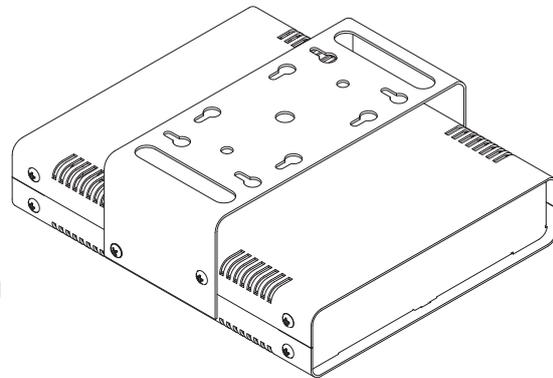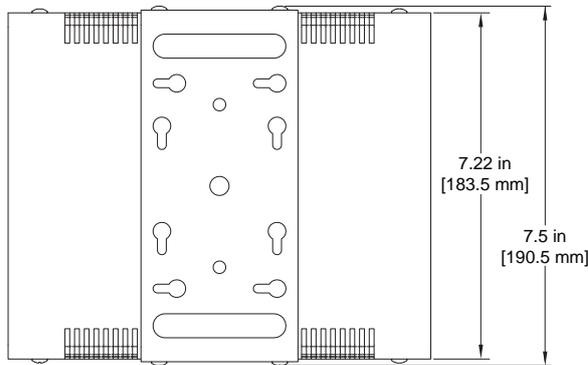

Dimensions in inches [millimeters]

