



DMX Control for LED Neon, Tape, and Other Low-Voltage Systems

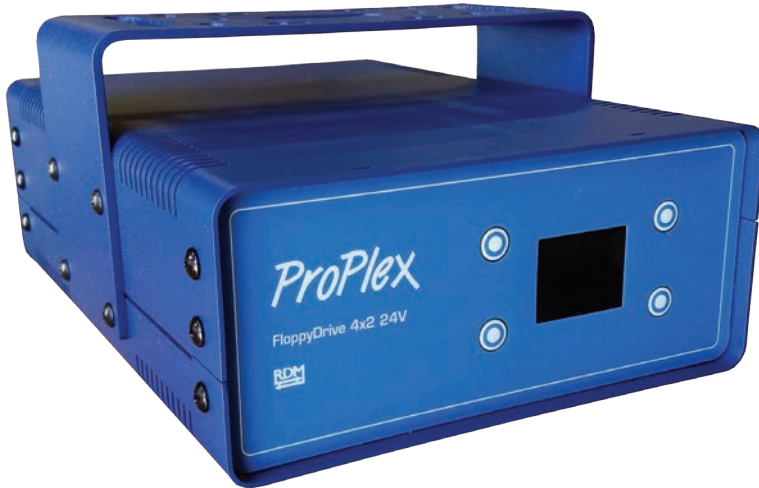

- Perfect for FloppyFlex LED neon, FloppyTape LED tape, and other 24 VDC LED neon or tape systems. (Max. length of runs per output varies with neon or tape product.)
- Two 24 VDC outputs. 12 VDC version also available
- Rugged, tour-ready ProPlex "Blue Box" PortableMount chassis. Packaged for extreme conditions. Shock-mounted circuitry. Advanced thermal management
- Colour LCD Display with easy-function control buttons for easy setup and configuration
- Heavy-duty yoke for truss mounting. Optional RackMount Kit available.
- RDM functionality for complete system monitoring and addressing via RDM
- Self-healing overcurrent / short circuit protection
- 2-, 3-, and 5-wire (1-, 2-, and 4-channel) versions also available

Great for
FloppyFlex
LED Neon

Great for
FloppyTape
LED Tape

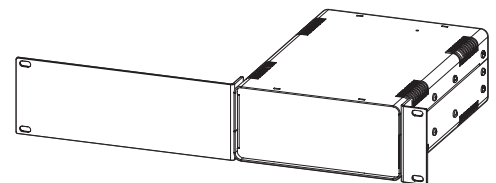

RackMount Kit available

BUILT TO LAST!





ProPlex - DATA DISTRIBUTION YOU CAN DEPEND ON



Worldwide Exclusive Distribution

Technical Specifications		
Part Number	PPFD24VP4	PPFD12VP4
Control Channels	3 (4-wire)	
Control	DMX 512A +RDM	
AC Power	90-240 VAC, 50/60 Hz	
Output Power	24 VDC	12 VDC
Output Wattage	350 W total	
Power Consumption	Up to 400 W	
Cooling	Passive/ Active	
Power Connectors	PowerCon 20A IN/THRU	
DMX Connectors	5-pin XLR IN/THRU	
Output Connectors	2 SpeakOn NL4	
DMX Channels	3-12	
Unit Dimensions (WxHxD)	7.95 x 5.33 x 10.72" [202 x 135.4 x 272.3 mm] with yoke 7.95 x 3.42 x 10.72" [196.1 x 86.9 x 272.3 mm] without yoke	
Shipping Dimensions (WxHxD)	10.25 x 7.3 x 13.5" [261 x 186 x 343mm]	
Unit Weight	8.75 lbs [3.98 kg]	
Shipping Weight	10.20 lbs [4.64 kg]	

* 1-, 2-, and 4-channel (2-, 3- and 5-wire) versions available by special order

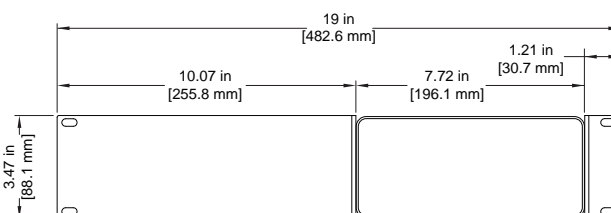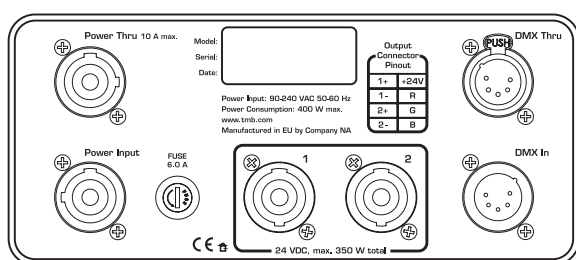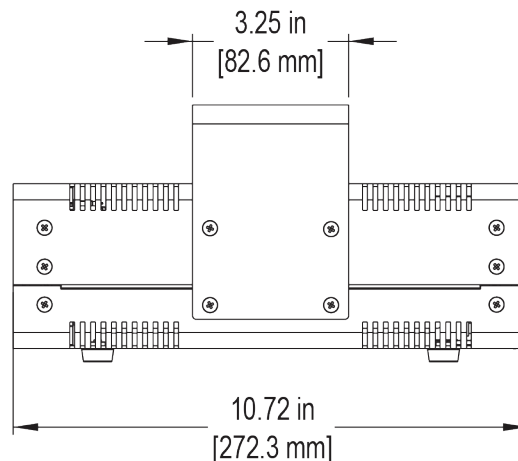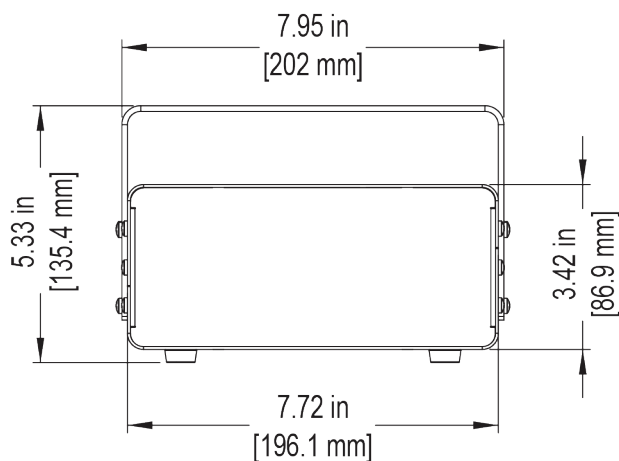

2U RackMount Kit