



# MSR Gold™ SA Double Ended

## MSR Gold 700 SA/2 DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Operating Position	UNIVERSAL [Any or Universal (U)]
Cap-Base	SFC10-4 [SFC10-4]
Light Technical	
Color Code	- [Not Specified]
Luminous Flux	48,000 lumen
Chromaticity Coordinate X (Nom)	299
Chromaticity Coordinate Y (Nom)	320
Correlated Color Temperature (Nom)	7500 K
Luminous Efficacy (Rated) (Min)	62 lm/W
Luminous Efficacy (rated) (Nom)	69 lm/W


Color rendering index (CRI)	73
Operating and Electrical	
Power Consumption	700 W
Lamp Current (Nom)	11.5 A
Controls and Dimming	
Dimmable	No
Product Data	
Full product code	871829122123400
Order product name	MSR Gold 700 SA/2 DE 1CT/4
Order code	928174705115

MSR Gold™ SA Double Ended

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material number (12NC)	928174705115
Full product name	MSR Gold 700 SA/2 DE 1CT/4


EAN/UPC - Case	8718291221241
----------------	---------------

Dimensional drawing

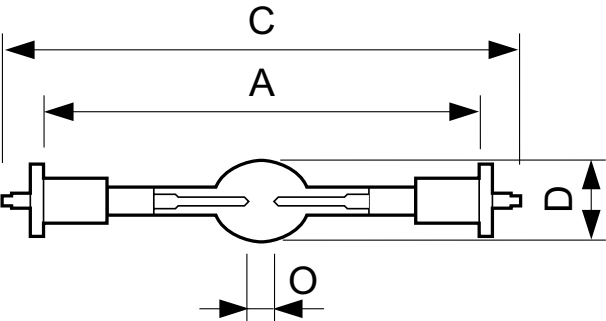

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold 700 SA/2 DE 1CT/4	19 mm	4.0 mm	114.4 mm	115.2 mm	114.8 mm	136 mm

Photometric data

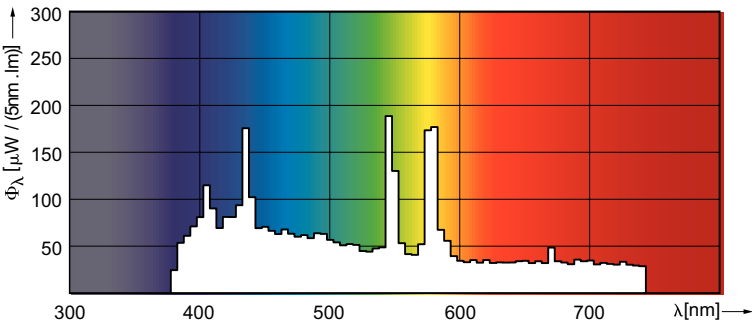

Spectral Power Distribution Colour - MSR Gold 700 SA/2 DE 1CT/4

