



Technical data sheet

A215-M




[Download documents](#)



PSI Audio Original Technology



CPR Compensated Phase Response system
AOI Adaptive Output Impedance system
PSC Phantom Standby Control

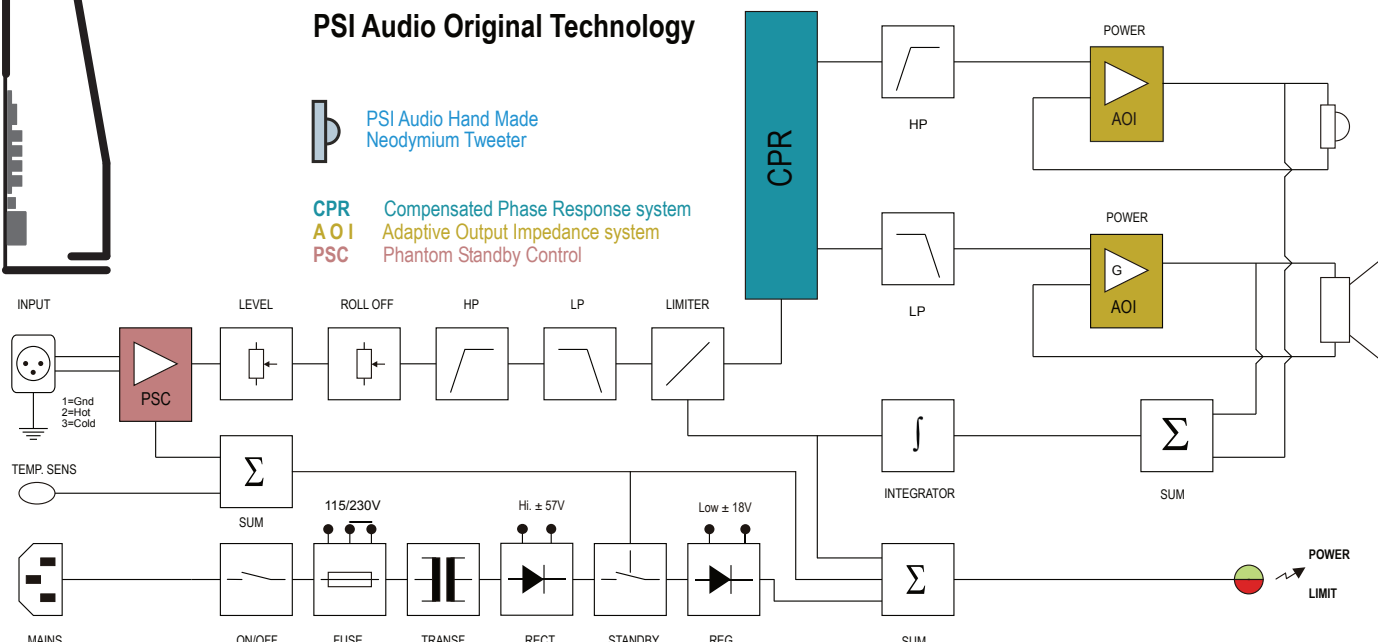

Potential peak power	290+55	W
RMS power	60+10	W
Input impedance	Sym 10 kΩ	Ω
Input sensitivity	0.775	Vrms
Input overload	24	Vpp
Continuous max SPL@1 m	102	dB
Short term max. SPL@1m	106	dB
Peak max. SPL@1m	115	dB
Background noise @1m	4	dBA
Signal to noise ratio (S/N)	98	dBA
Mechanical noise (i.e. transformer)	-8	dBA
Bandwidth at -6dB	36-23'000	Hz
SPL tolerances	±2.0	dB
Phase tolerances	± 45 (250 Hz – 20 kHz)	deg
Dispersion (H x V)	80 x 60	deg
Directivity Factor	SEE GRAPH	
Acoustic Power	SEE GRAPH	
Distortion THD	SEE GRAPH	
System	2	ways
Crossover frequency	1'800	Hz
Box Material	MDF	
Woofer ext. diam.	2x 147	mm

Woofer ext. diam.	2x 5.8	in
W. diaphragm diam.	2x 104	mm
W. diaphragm diam.	2x 4.1	in
Tweeter ext. dim.	100	mm
Tweeter ext. dim.	3.9	in
T. diaphragm diam.	27	mm
T. diaphragm diam.	1.06	in
Dimensions W x H x D	166 x 1'110 x 230	mm
Dimensions W x H x D	6.6 x 43.9 x 9.9	in
Net Weight	15	kg
Net Weight	33.1	lbs
Input connector	1 x XLR F / 3P	
Input connections	1=GND, 2=(+), 3=(-)	
Mains voltage	115 / 230(50-60Hz)	V, ±10 %
Mains max DC offset	0.2	V
Standby consumption	1	W
Quiescent consumption	5	W
Max continuous Power	150	W
RMS continuous consumption	95	W
Max Relative humidity	70	%
External temperature range	5-35	°C
Warranty	5 (+1)	years


Measurement environment:

- Large anechoic room, temperature 23±2°C, humidity 50±20%
- Typical acoustical measurements, tolerances ±0.5 dB averaging 1/6 Octave

Frequency Response

— SPL@ (-10dBu ; 1m)
— SPL with -10dB Roll Off
— Acoustic Power


Resolution: 1/48 Octave
Smoothing: 1/6 Octave

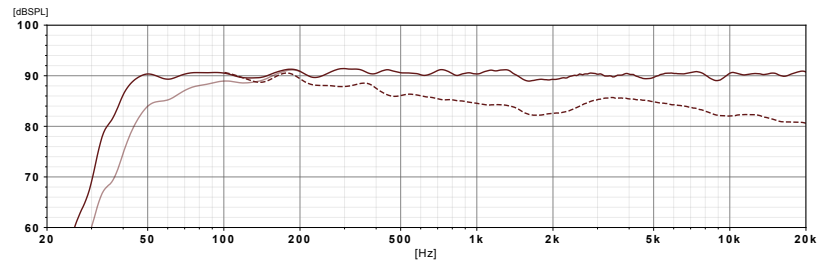

Total Harmonic Distortion

— THD@ (-10dBu ; 1m)


Resolution: 1/48 Octave
Smoothing: 1/6 Octave

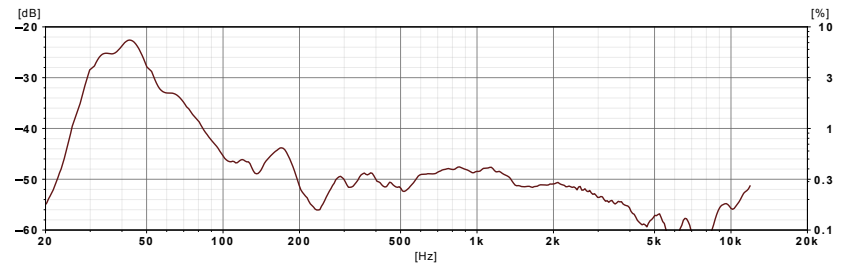

Acoustic Phase


— Acoustic Phase

Delay: 0.395 [ms]
Resolution: 1/48 Octave
Smoothing: 1/6 Octave

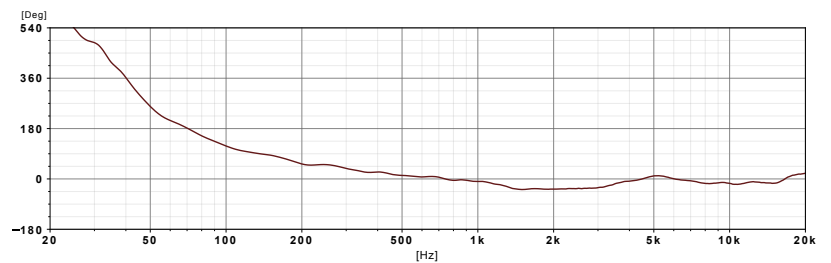


Max Continuous SPL

— Max Continuous SPL @ 1m

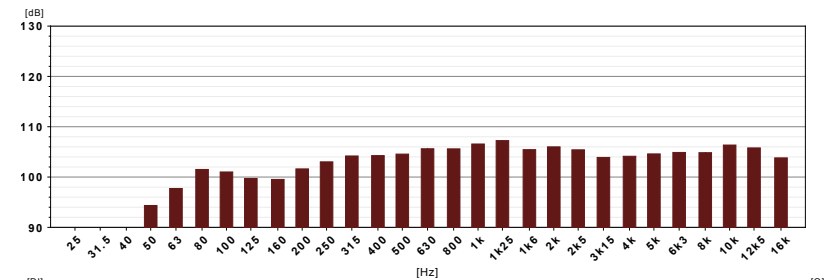



Directivity Index

— Directivity Index

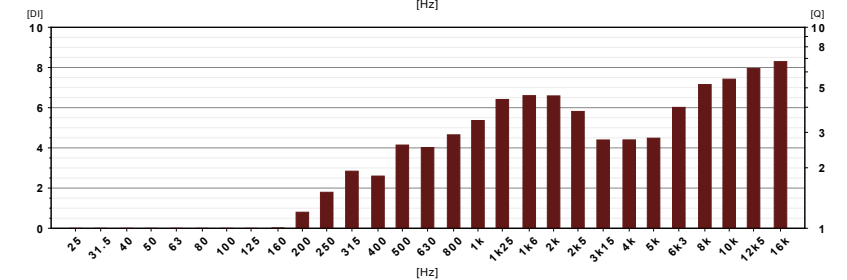



Horizontal Directivity

Frequency resolution: 1/36 Octave
Smoothing: 1/3 Octave

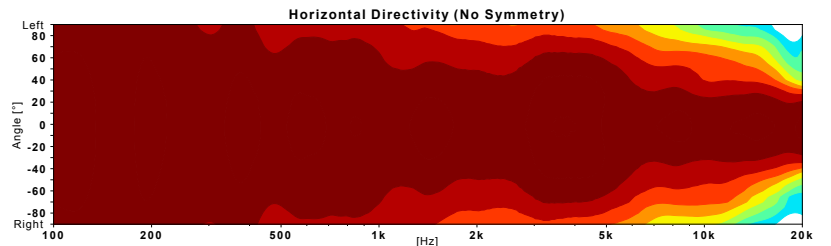

Vertical Directivity

Frequency resolution: 1/36 Octave
Smoothing: 1/3 Octave

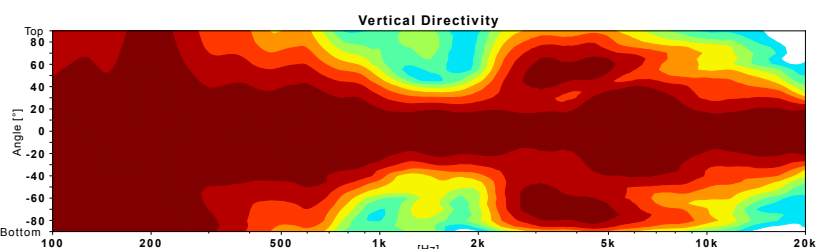

Mounting


All dimensions are in mm




Bottom view

Transport position

Spacing has to be adjusted to get the maximum of stability.



Acoustical axis

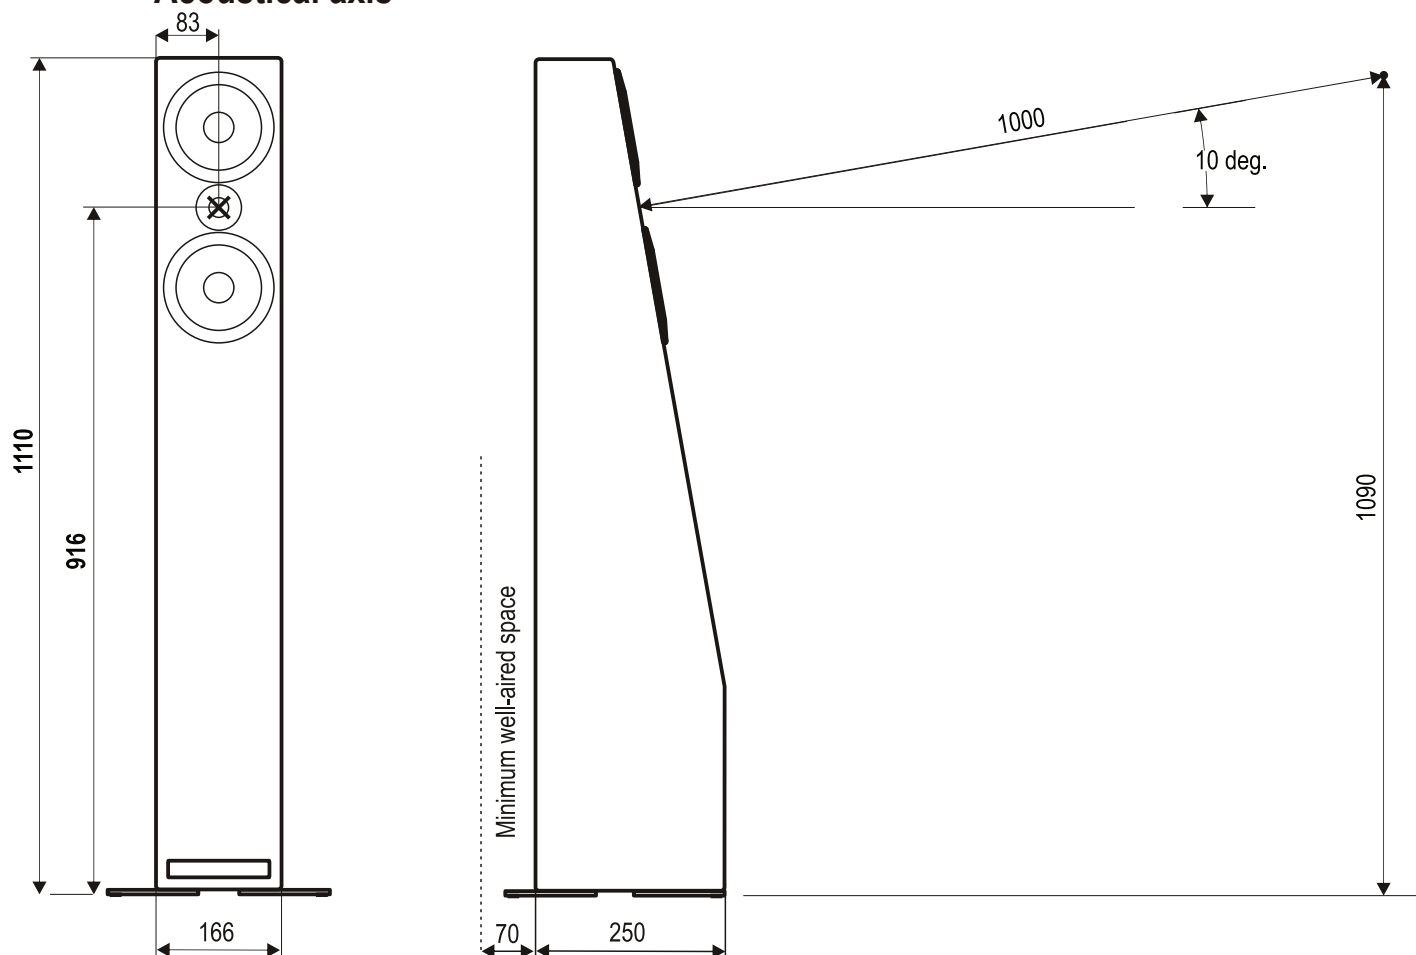

Recommended listening distance

