





# **Profile Spotlight Series**



### **SPECIFICATIONS**

The Source Four® LED Fresnel adapter uses all the power and beauty of the Source Four LED light engine to create an astounding beam light suitable for any stage or studio. With ETC's unique interface, you can quickly turn your Source Four LED into a powerful, controllable Fresnel. With the addition of this accessory, your Source Four LED will always be the right fixture for the job.

### **PHYSICAL**

- Rugged, die-cast, aluminum construction
- Fits all standard Source Four LED light engines
  - \*Not for use with HPL Source Four fixtures\*
- Compatible with ETL and CE fixtures
- Quick and easy operation
- Compact optics
- Single-handed accessory-slot access
- Simple setup
- · Available in black only

# **OPTICAL**

- Bright, smooth washlight
- Maximum color control with ETC's x7 Color System™
- 15-50 degree zoom
- Barn-door beam shaping
- Heat- and impact-resistant polycarbonate lenses

## ORDERING INFORMATION

#### **Source Four LED Fresnel**

MODEL	DESCRIPTION
S4LEDFRES	Source Four LED Fresnel Adapter

For a complete fixture, order the Source Four LED fixture body in addition to the Fresnel adapter.


# **Accessories**

MODEL	DESCRIPTION
400BD	Barn Door
400PTH3	Top hat, 3in
400PTH6	Top hat, 6in
400PHH	Half hat

Source Four products are protected by one or more of the following patents:

U.S.	USRE36,3316, US5,345,371, US6,092,914 and US5,775,799
U.K.	GB0592589, GB0673488, 99930527.9*
Germany	DE0592589, GB0673488, 99930527.9*
Japan	JP2,501,772

<sup>\*</sup> European patent application number



# **Profile Spotlight Series**

### PHOTOMETRICS


For photometry data, please view the Source Four LED Photometry Guide, which can be found at www.etcconnect.com.

### PHYSICAL

# **Source Four LED Fresnel Weights**

MODEL	WEIGHT		SHIPPING WEIGHT	
	lbs	kgs	lbs	kgs
Source Four LED Fresnel Adapter	9.2	4.2	10.8	4.9

<sup>\*</sup>Weight measurements are for the adapter only.

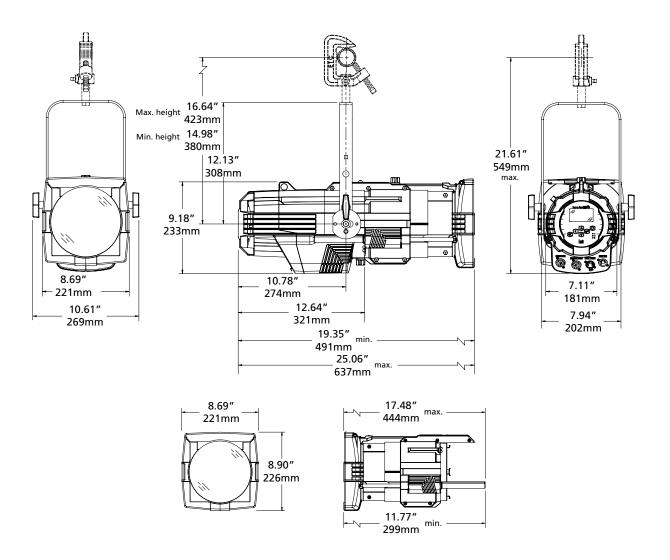



Corporate Headquarters • 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA • Tel +1 608 831 4116 • Fax +1 608 836 1736 London, UK • Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK • Tel +44 (0)20 8896 1000 • Fax +44 (0)20 8896 2000 Rome, IT • Via Pieve Torina, 48, 00156 Rome, Italy • Tel +39 (06) 32 111 683 • Fax +44 (0)20 8752 8486 Holzkirchen, DE • Ohmstrasse 3, 83607 Holzkirchen, Germany • Tel +49 (80 24) 47 00-0 • Fax +49 (80 24) 47 00-3 00

Hong Kong • Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong • Tel +852 2799 1220 • Fax +852 2799 9325 Web • www.etcconnect.com • Copyright©2016 ETC. All Rights Reserved. All product information and specifications subject to change. 7460L1012 Rev. C Printed in USA 04/16