



# We've got you covered **MRO** sloping roofs

- 8x6m (26.25x19.89 ft) Sloping Roof set-up for temporary events
- Heavy-duty M290 Quatro structure with Duo canopy support
- Gentle sloping roof design using special wedges & reinforced multi-cubes
- Supplied complete with internal wind bracing wires & connection accessories
- Full structural calculation report & build manual available
- PVC roof colour options and side walls available

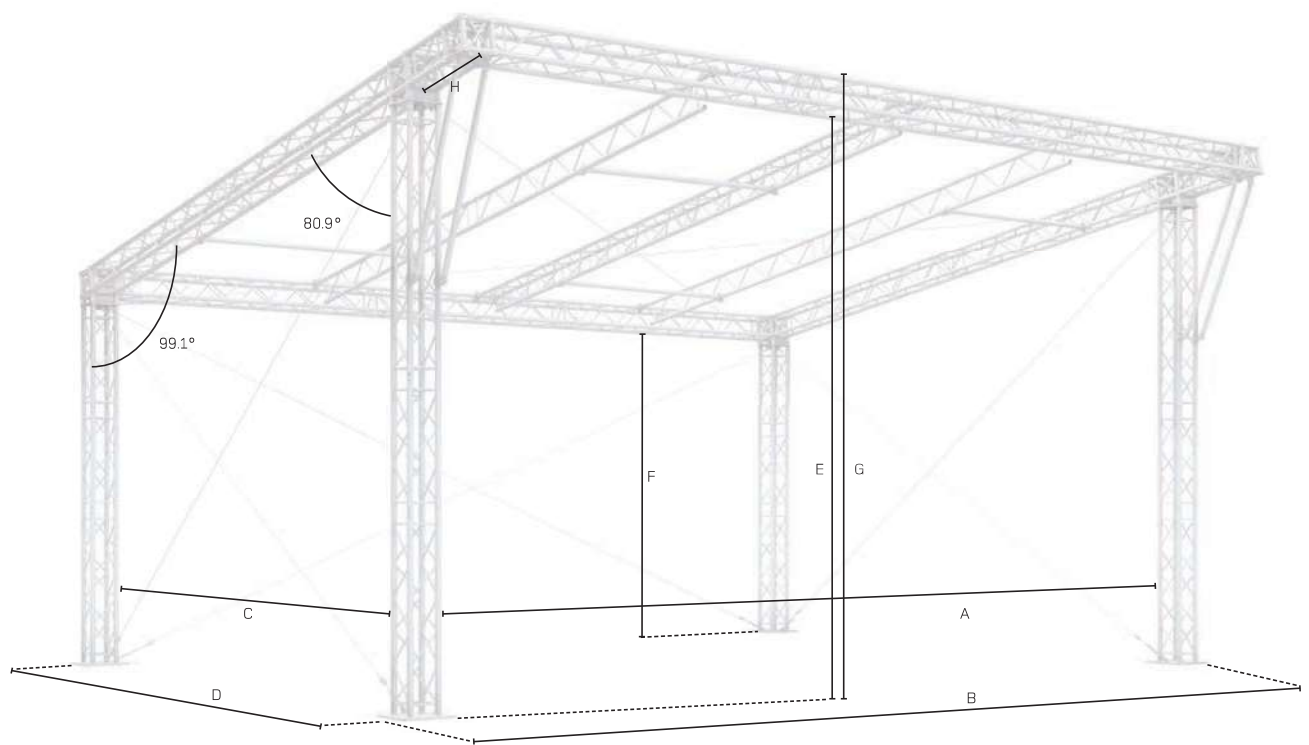

TECHNICAL SPECIFICATIONS							
Dimensions		Stage size ›	8x6 m	26.25x19.70 ft			
	A	Internal width	8.50 m	27.89 ft			
	B	Overall external width	9.24 m	30.31 ft			
	C	Internal depth	6.50 m	21.33 ft			
	D	Overall external depth	7.29 m	23.92 ft			
	E	Front clearance	4.74 m	15.55 ft			
	F	Back clearance	3.62 m	11.88 ft			
	G	Overall height	5.08 m	16.67 ft			
	H	Cantilever depth	0.80 m	2.62 ft			

LOADING CAPACITY							
Loading capacity		Stage size ›	8x6 m	26.25x19.70 ft			
	Back & side truss	Uniformly distributed (UDL)	30kg/m	20lbs/ft			
	Middle truss	Uniformly distributed (UDL)	10 kg/m	6 lbs/ft			
	Cantilever truss	Uniformly distributed (UDL)	20 kg	14 lbs/ft			
	PA load	Point load each cantilever corner	100 kg	220 lbs			
* See structural report for exact load positioning							

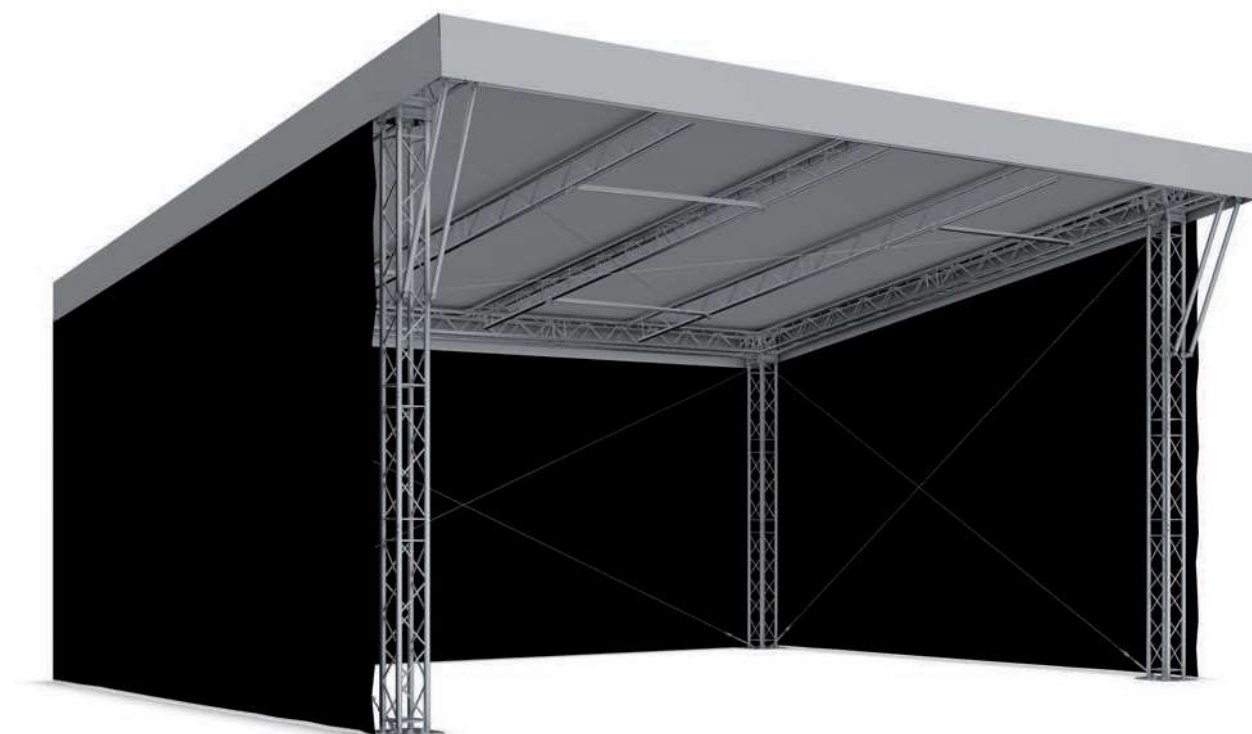

#### OPERATIONAL SPECIFICATIONS

Design standards	<p>DIN EN 13814 (2005) Fairground and amusement park machinery and structures</p> <p>DIN EN 1991 / Eurocode 1 Actions on structures</p> <p>DIN EN 1999 / Eurocode 9 Design of aluminium structures</p> <p>DIN EN 1993 / Eurocode 3 Design of steel structures</p> <p>• All of our structures are produced under EN 1090 EXC2 as standard and include the necessary guy wires, instruction manual and engineering report</p>
Wind management	<p>In service 17.8m/s - 64km/h - 40mph (Max. gust wind speed)</p> <p>* Calculations based on 100% closed side canopies</p> <p>* Side canopies and loads to be removed above this wind speed if not considered</p> <p>Out of service 28.0m/s - 100km/h - 62mph (Max. gust wind speed)</p>
Ballast	<p>This can vary per tower from 450kg / 992lbs up to 2700kg / 5947lbs and depends on:</p> <ul style="list-style-type: none"> <li>• If tower bases are interconnected or free standing</li> <li>• Layout of canopies</li> <li>• Self-weight of load or interconnected stage is considered (Might be deducted from ballast under certain conditions)</li> <li>• Friction material used between screw jacks, padding and sub soil</li> </ul>
Canopy & sidewalls	<p>B1 fire retardant canopy on request, single piece format</p> <p>Silvergrey, other colors or inside black on request</p> <p>B1 fire retardant side nets in compliance with latest Eurocodes</p>
Customized	<p>Customisation (i.e. truss configuration, alternative dimensions, roof adjustability) upon request</p>

#### TRANSPORTATION DATA

	Stage size ›	8x6 m	26.25x19.70 ft				
Self-weight	* Exact self-weight depends on configuration	600 kg	1322 lbs				
Transport volume	* Packed in carton boxes and bubble foil	5.00 m <sup>3</sup>	176 ft <sup>3</sup>				