


We've got you covered

MR4 arched roofs

- MR4 Mega-Arc Roof structure for temporary events
- MT2 self-climbing towers up to 12.5 m high (41.01 ft) with M400 / M520 main grid
- Keystone 'arch' created using standard straight sections & angled hinge parts
- Fast connection for quick, simple and secure assembly
- Supplied complete with internal wind bracing wires & connection accessories
- Full structural calculation report & build manual available
- PVC roof colour and side wall options
- Integrated tower base / stage components available
- PA wing options available on request

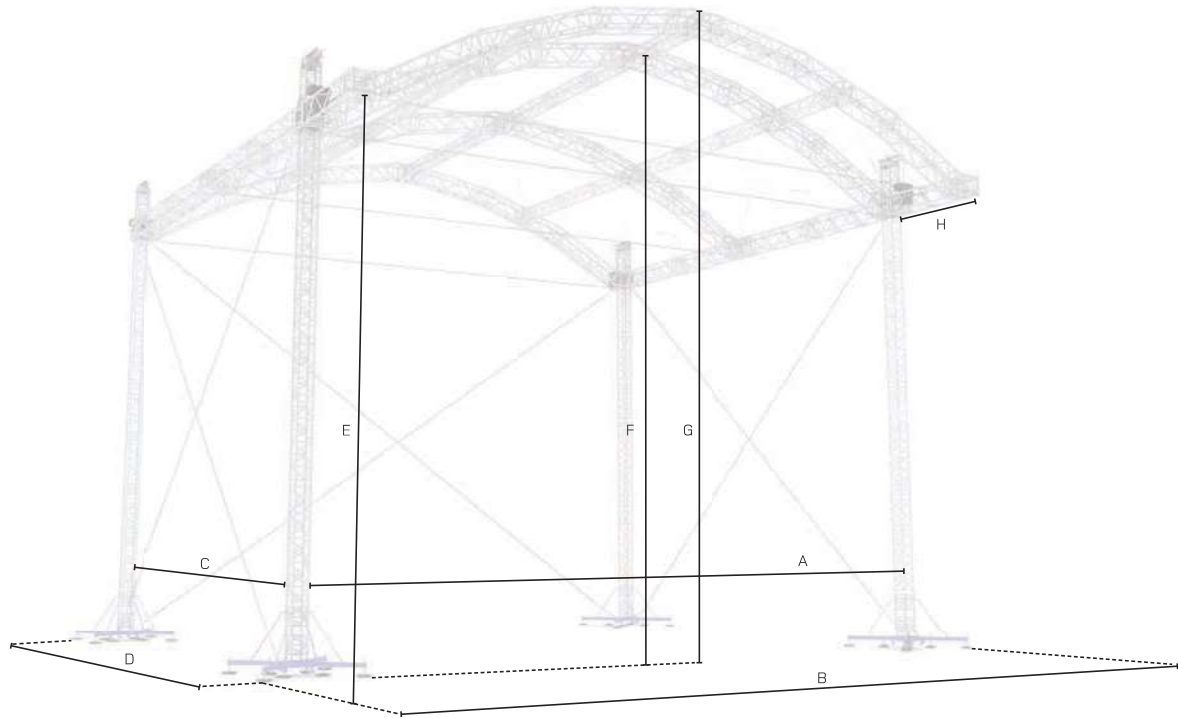

TECHNICAL SPECIFICATIONS							
Dimensions	Stage size ›		20x12 m	65.62x39.37 ft	16x12 m	52.50x39.37 ft	
	A	Internal width	20.50 m	67.26 ft	16.50 m	54.13 ft	
	B	Overall external width	23.12 m	75.85 ft	19.12 m	62.73 ft	
	C	Internal depth	13.03 m	42.75 ft	13.03 m	42.75 ft	
	D	Overall external depth	15.65 m	51.35 ft	15.65 m	51.35 ft	
	E	Side clearance	11.53 m	37.83 ft	11.53 m	37.83 ft	
	F	Middle clearance	14.30 m	46.92 ft	14.30 m	46.92 ft	
	G	Overall height	14.90 m	48.88 ft	14.90 m	48.88 ft	
	H	Cantilever depth	2.70 m	8.86 ft	2.70 m	8.86 ft	

LOADING CAPACITY							
Loading capacity	Stage size ›		20x12 m	65.62x39.37 ft	16x12 m	52.50x39.37 ft	
	Main grid	Uniformly distributed (UDL)	5456 kg	12018 lbs	4365 kg	9615 lbs	
		or 8x Point loads of 800kg	8000 kg	17621 lbs	6400 kg	14097 lbs	
	PA wing	Central Point load (CPL)	1500 kg	3304 lbs	1500 kg	3304 lbs	
* See structural report for exact load positioning							



OPERATIONAL SPECIFICATIONS

Design standards	<p>DIN EN 13814 (2005) DIN 1055-4 DIN 4113 DIN 18800</p> <p>Fairground and amusement park machinery and structures Actions on structures / wind Design of aluminium structures Design of steel structures</p> <p>• All of our structures are produced under EN 1090 EXC2 as standard and include the necessary guy wires, instruction manual and engineering report</p>
Wind management	<p>In service 20.8m/s - 74km/h - 46mph (Max. gust wind speed)</p> <p>* Calculations based on 30% minimum permeable side canopies</p> <p>* Side canopies to be removed above this windspeed if not considered</p> <p>Out of service 28.3m/s - 100km/h - 62mph (Max. gust wind speed)</p> <p>Training recommended</p>
Ballast	<p>This can vary per tower from 4750kg / 10462lbs up to 12634kg / 27828lbs and depends on:</p> <ul style="list-style-type: none"> • If tower bases are interconnected or free standing • Layout of canopies • Self-weight of load or interconnected stage is considered (Might be deducted from ballast under certain conditions) • Friction material used between screw jacks, padding and sub soil
Canopy & sidewalls	<p>B1 fire retardant canopy on request, in keders</p> <p>Silvergrey; other colors or inside black on request</p> <p>B1 fire retardant side nets in compliance with latest Eurocodes</p>
Customized	<p>Customisation (i.e. truss configuration, alternative dimensions, roof adjustability) upon request</p>

TRANSPORTATION DATA

	Stage size >	20x12 m	65.62x39.37 ft	16x12 m	52.50x39.37 ft		
Self-weight	* Exact self-weight depends on configuration	4680 kg	10308 lbs	3200 kg	7048 lbs		
Transport volume	* Packed in carton boxes and bubble foil	80 m³	2825 ft³	70 m³	2472 ft³		