
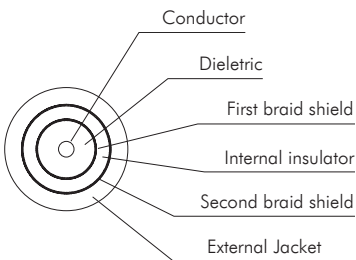


Triax Camera Cables

eurocable triax cables are used to connect Video Broadcast cameras. They feature 75 ohm nominal impedance, low attenuation values at long run, long flex life jacket. This cable is available in 8, 11 and 14 mm overall diameter versions, to be chosen depending on the distances to cover.

	
MOBILE	MOBILE
JACKET COLOR 	JACKET COLOR 
1000 m ON WOODEN REELS	1000 m ON WOODEN REELS
	
CVS LKTRIAx08	CVS LKTRIAx11
• 8 mm overall diameter.	• 11 mm overall diameter.

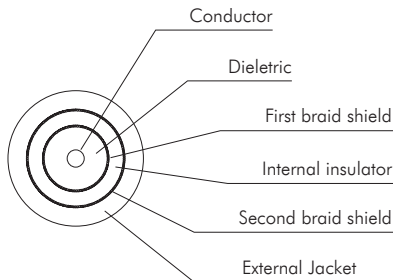

CVS LK Code			TRIAx08	TRIAx11	TRIAx14*
ELECTRICAL DATA					
D.C.R. at 20°C	Conductor		< 22.40 ohm/km	< 11.50 ohm/km	6.00 ohm/km
	Shield	First	< 8.50 ohm/km	< 4.50 ohm/km	3.00 ohm/km
		Second	< 7.80 ohm/km	< 5.50 ohm/km	2.50 ohm/km
Capacitance			55 pF/m		58 pF/m
Nominal Impedance			75 ohm		
Attenuation db/100 m - MHz			1.0 at 1 / 2.0 at 5 / 2.8 at 10 / 4.0 at 20 / 5.8 at 40 / 6.4 at 50 / 7.1 at 60 / 9.1 at 100	0.6 at 1 / 1.4 at 5 / 2.0 at 10 / 2.8 at 20 / 4.0 at 40 / 4.6 at 50 / 5.0 at 60 / 6.5 at 100	0.4 at 1 / 0.9 at 5 / 1.35 at 10 / 1.95 at 20 / 2.8 at 40 / 3.1 at 50 / 3.4 at 60 / 4.65 at 100
Vel. of Prop.			80%		
Inductance			30 µH/100 m		
GENERAL DATA					
Cable	O.D.		8.30 mm	10.90 mm	14.40 mm
	Standard reels		1.000 m		400 m
	Weight		10.50 Kg/100 m	17.80 Kg/100 m	28.80 Kg/100 m
	Operating temperature		-20° C/+70° C		
Jacket	Material		PVC TM2		
	Nom. Thick.		0.55 mm	1.00 mm	0.75 mm
Shield	Material		First: Silver plated braid shield Second: Bare copper braid shield		
	Coverage		First: 90% - Second: 90%		
Conductor	Qty		1		
	Strand		1 x 1.00 mm	1 x 1.40 mm	7 x 0.75 mm
	Area/AWG		0.78 mm²/18	1.50 mm²/16	3.00 mm²/12
	Dielectric O.D.		4.50 mm	6.30 mm	9.70 mm
	Material		Silvered solid copper foamed, polyolefine insulated		

* on request

Not suitable for applications above 50 volt ac, 75 volt dc.