



# QUASAR 15K OUTDOOR

## 15,000 WATT VERY BRIGHT OUTDOOR STROBE



### FEATURES

- Stainless steel housing is rated to IP65.
- 450,000 lumens maximum output!
- DMX512 control.
- Continuous lighting capability (120Hz).
- Automatically controlled electronic safety feature.
- Auto voltage sensing.
- Thermal shut-down feature.
- Highly accurate flashing system.
- Three phase system capability.
- Compact size.
- SELF-Test functions, LED indicators.
- Optional controllers can execute pre-programmed or customized lightning sequences at the push of a button or triggered via DMX512.

Innovative, Performance-Driven Show Technology Since 1983

tmb.com

Los Angeles

+1 818-899-8818

London

+44 (0)20-8574-9700

New York

+1 201-896-8600

Beijing

+86 10-8492-1587

Toronto

+1 519-538-0888







# QUASAR 15K OUTDOOR

## SPECIFICATIONS

LAMP	Maximum continuous flash discharge	2.5 seconds
	Frequency of continuous mode	120 Hz
	Flash tube type	Proprietary Long Arc Xenon tube
	Color temperature	5600° Kelvin
CONTROL PARAMETERS	Intensity control	
	Adjustable flash frequency	
ELECTRONIC & SAFETY DEVICES	Overheating protection	80°C, 110 °C, self resetting
	Self-test	Preprogrammed
	Indicator LED'S	Red: POWER Yellow: MODE/PROTECTION Green: DATA
CONTROL SYSTEM	Digital display and pushbutton programming of parameters	
	Number of channels	2
	Connection type	Terminal block
	Supported Protocols	DMX512
POWER SUPPLY	Nominal mains voltage	190-260 VAC, 50-60 Hz
	Power requirement	32A breaker
	Max. power draw	Continuous 60A
		Turbo 32A
FIXTURE & HOUSING	Protection from breaking flash tube	Soft spring suspension system
	Fixing	Adjustable yoke
	Corrosion protection	Stainless steel body, IP65 rating
	Unit Dimensions (HxWxD)	9.25" x 19.5" x 12.215" / 23.5 x 49.5 x 31 cm
	Shipping Dimensions (HxWxD)	TBA
	Unit weight	TBA
	Shipping weight	TBA

Specifications and features are subject to change without notice.

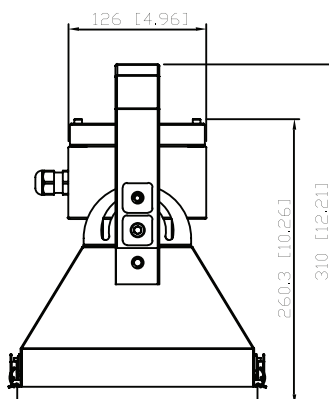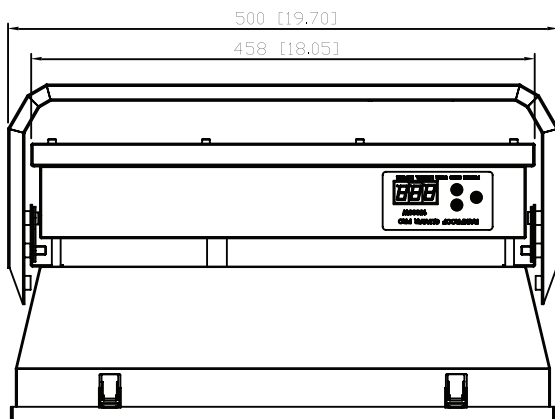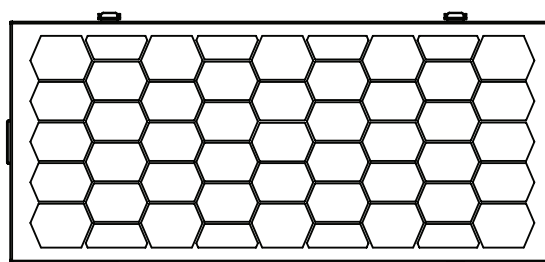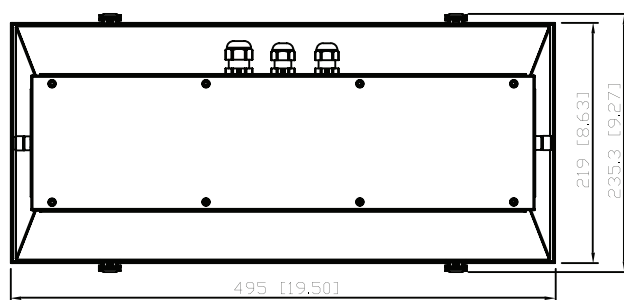

Dimensions  
in Millimeters  
[Inches]