




T-LIGHT

Bad-Ass Lightning Machine

85,000 Watts!

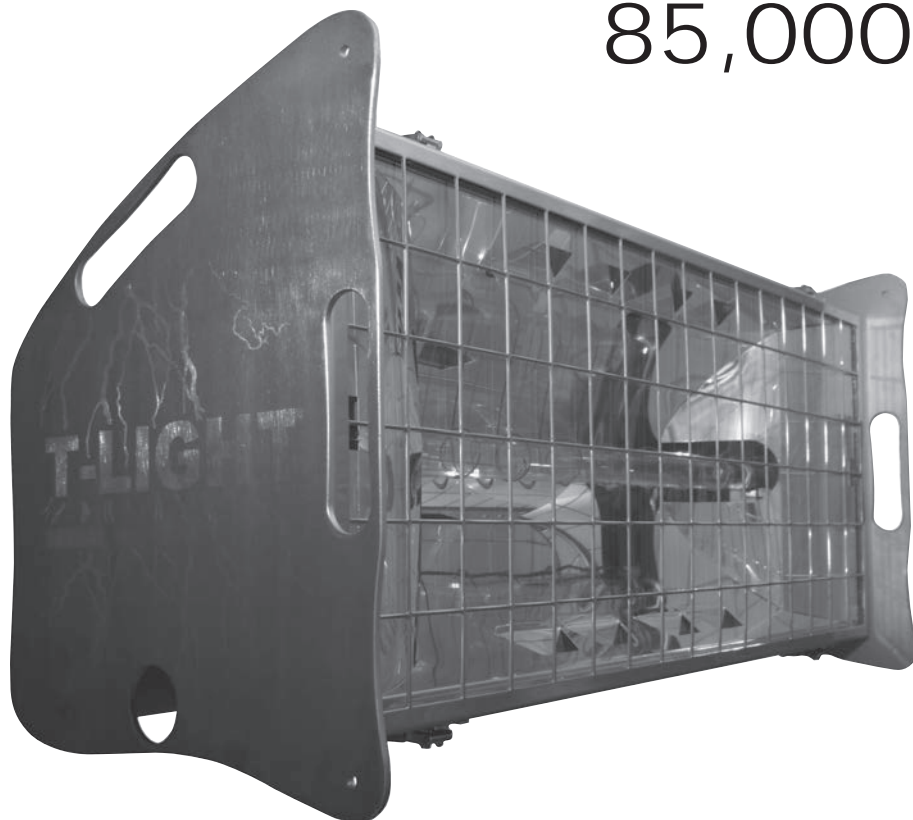

FEATURES

- Flash length from 1/30 sec to 3.5 sec.
- Stainless steel body lasts for years.
- DMX512 control.
- Beam is adjustable from spot to flood.
- Compact, fits into a Pelican™ case.
- Has internal and thermal circuit breaker and residual current operated circuit breaker.
- Optional controllers can execute pre-programmed or customised lightning sequences at the push of a button or triggered via DMX512.



Innovative, Performance-Driven Show Technology Since 1983

tmb.com

Los Angeles

London

New York

Beijing

Toronto

+1 818-899-8818

+44 (0)20-8574-9700

+1 201-896-8600

+86 10-8492-1587

+1 519-538-0888



T-LIGHT SPECIFICATIONS

LAMP	Maximum continuous flash discharge	3.5 sec
	Frequency of continuous mode	120 Hz
	Flash tube type	Proprietary Long Arc Xenon Tube
	Colour temperature	5600° Kelvin
CONTROL PARAMETERS	Intensity control	
	Adjustable flash frequency	
ELECTRONIC & SAFETY DEVICES	Overheating protection	80°C, 110 °C, self resetting
	Self-test	Preprogrammed
	Indicator LED'S	Red: POWER Yellow: MODE/PROTECTION Green: DATA
CONTROL SYSTEM	Digital display and pushbutton programming of parameters	
	Number of channels	2
	Connection type	5-Pin XLR
	Supported protocols	DMX512
POWER SUPPLY	Nominal mains voltage	190-250 VAC, 50-60 Hz
	Power requirement	100A breaker
	Max. power draw	350A
FIXTURE & HOUSING	Protection from breaking flash tube	Soft spring suspension system
	Fixing	Adjustable Yoke
	Corrosion protection	Stainless steel body
	Unit Dimensions (HxWxD)	15" x 33" x 10" / 38 x 84 x 25 cm
	Shipping Dimensions (HxWxD)	21" x 41" x 19" / 53 x 104 x 48 cm
	Unit Weight	39 lb. / 17.7 kg
	Shipping Weight	54 lb. / 24.5 kg

Specifications and features are subject to change without notice.

