


The image shows a close-up of several metal cell clamps. The clamps are cylindrical with a central hole and a smaller hole on the side. They are arranged in a row, with the foreground clamp in sharp focus and the others blurred in the background. A green rectangular overlay is positioned on the left side of the image, containing the text "Fixation and flexibility" and "Cell clamps".

Fixation and flexibility

**Cell clamps**


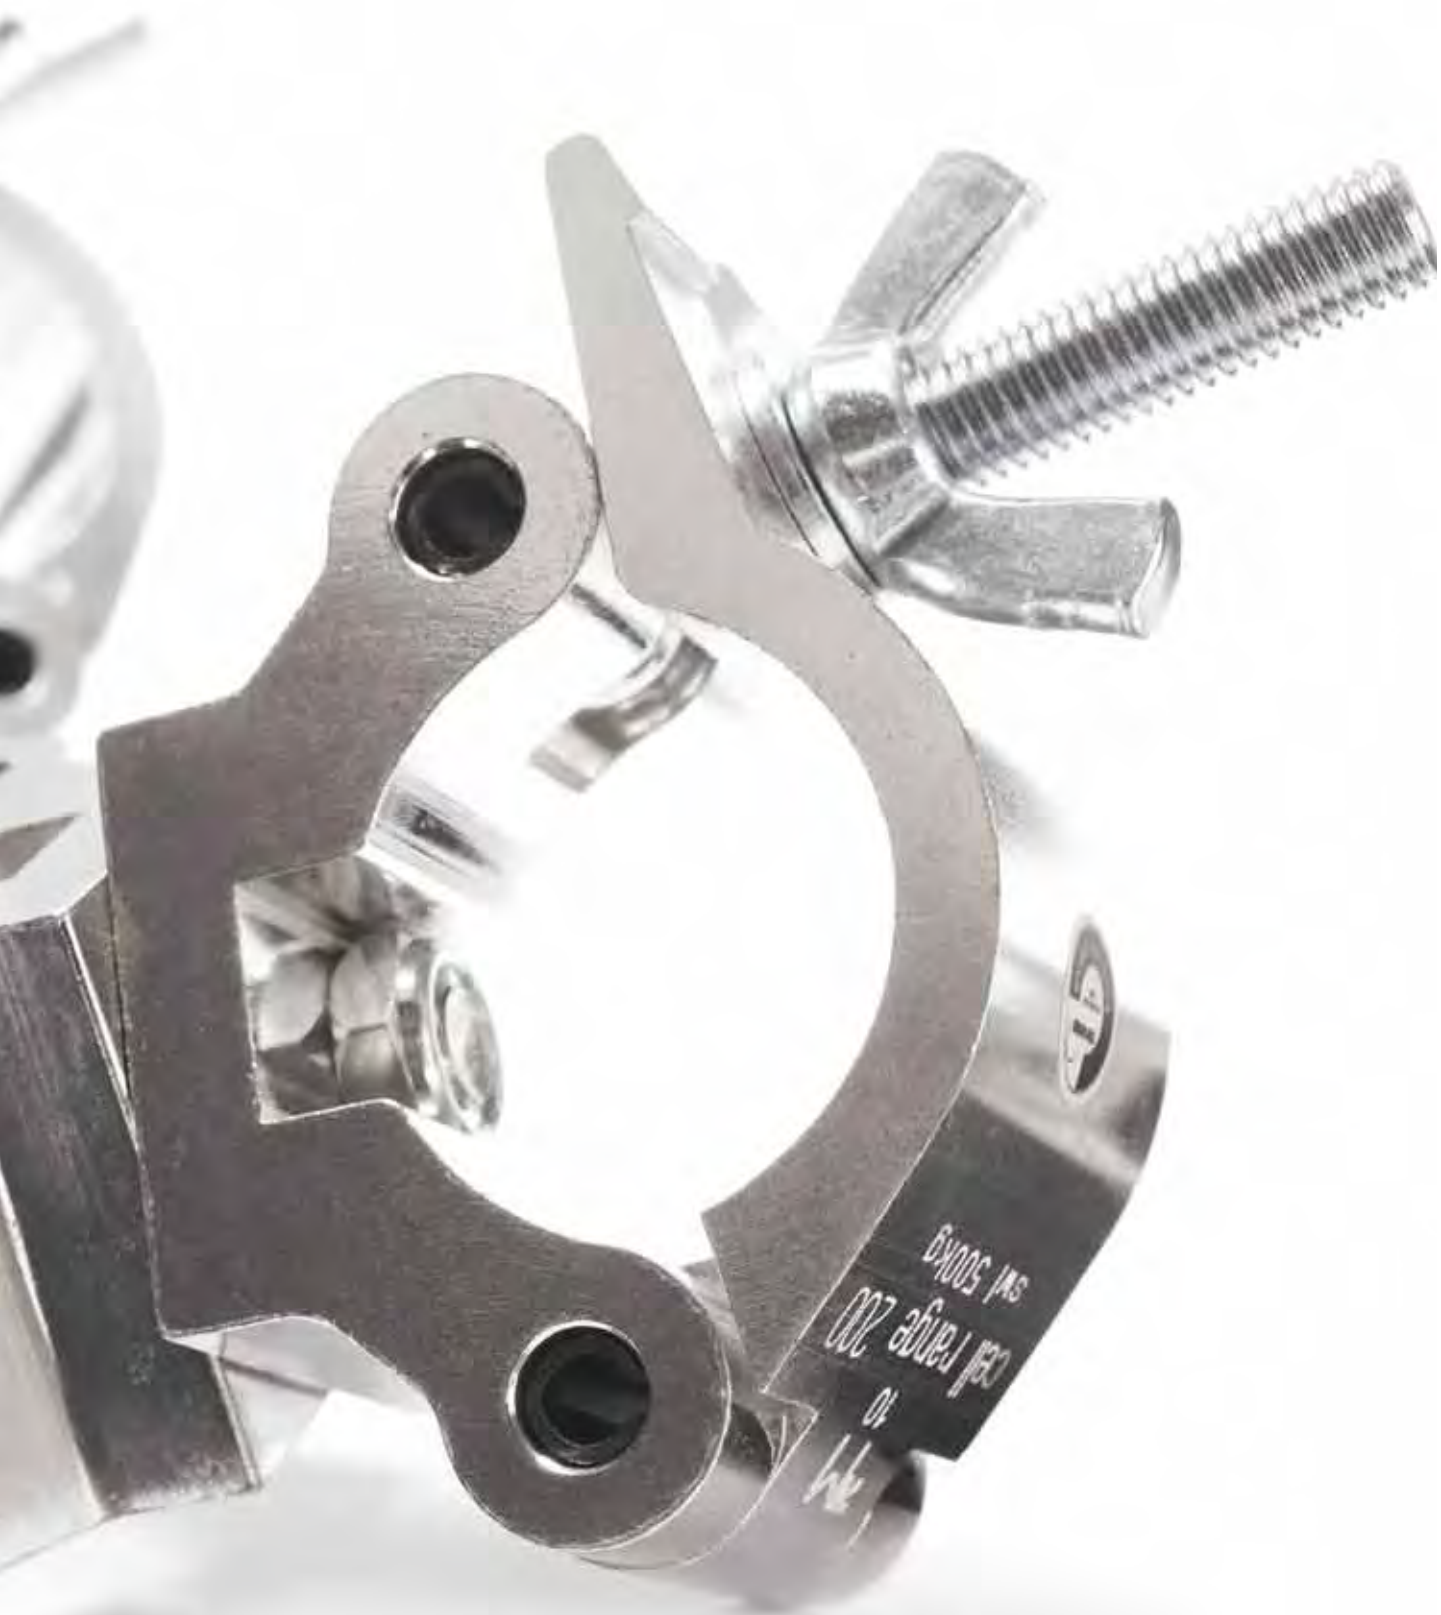


# Fixation and flexibility

## CELL 200 SERIES




- designed for tubes 48 – 51 mm (1 7/8" – 2")
- supplied with M12 closing bolt
- mounting hole suitable for up to 13 mm (1/2") bolt
- made from ultra high tensile aluminium alloy
- professional micropercussion marking
- highly polished surface
- anodized versions available on special request




CELL 201			Clamp basic
SWL	Weight	Ø	Basic Clamp can be used for most applications.
500 Kg	0,50 Kg	48-51 mm	
1102 lbs	1.10 lbs	1.89"-2"	


CELL 202			Clamp with bolt and wingnut
SWL	Weight	Ø	Clamp supplied with M12 x 35 bolt and wingnut.
500 Kg	0,59 Kg	48-51 mm	
1102 lbs	1.30 lbs	1.89"-2"	

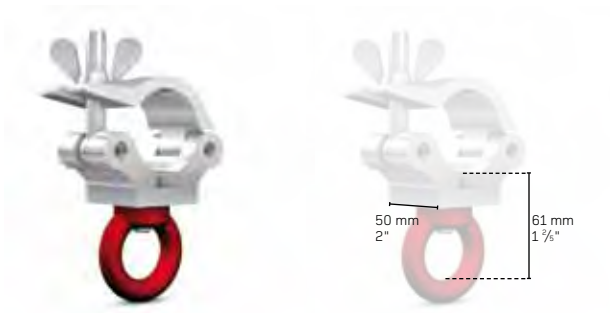


CELL 203			Clamp with lifting eye
SWL	Weight	Ø	Clamp supplied with steel eye for rope or cable attachment.
340 Kg	0,65 Kg	48-51 mm	
749 lbs	1,43 lbs	1.89"-2"	
500 Kg	0,65 Kg	48-51 mm	
1102 lbs	1,43 lbs	1.89"-2"	

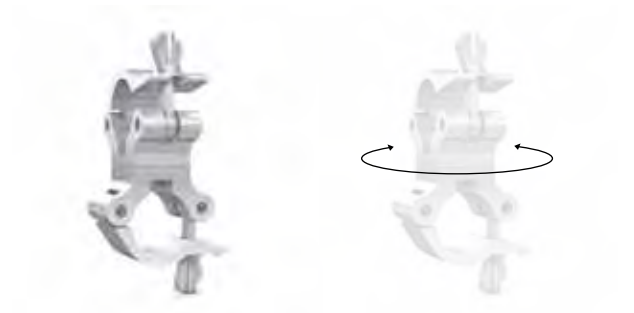

CELL 204			Swivel coupler
SWL	Weight	Ø	Set of two clamps free to rotate 360° for connection of two tubes.
500 Kg	1,00 Kg	48-51 mm	
1102 lbs	2,20 lbs	1.89"-2"	

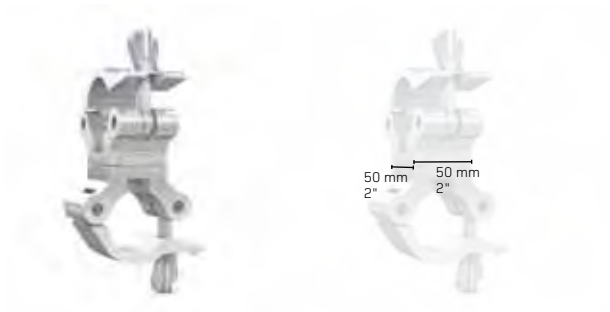


CELL 205			90° fixed coupler
SWL	Weight	Ø	Set of two clamps fixed at 90° to each other for connection of two tubes.
500 Kg	1,00 Kg	48-51 mm	
1102 lbs	2,20 lbs	1.89"-2"	

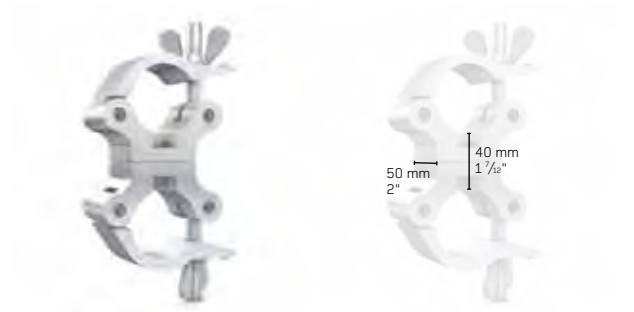


CELL 206			Parallel coupler
SWL	Weight	Ø	Set of two clamps fixed parallel to each other for connection of two tubes.
500 Kg	1,00 Kg	48-51 mm	
1102 lbs	2,20 lbs	1.89"-2"	




CELL 207			Slim clamp basic
SWL	Weight	Ø	Slim basic clamp can be used for for most applications.
300 Kg	0,30 Kg	48-51 mm	
661 lbs	0.66 lbs	1.89"-2"	

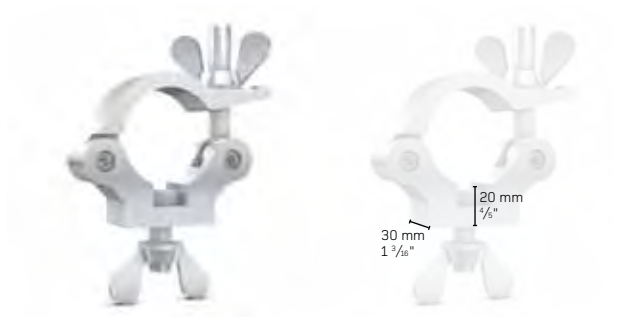

CELL 208			Slim clamp with bolt and nut
SWL	Weight	Ø	Slim clamp supplied with M12 x 50 bolt and wingnut.
300 Kg	0,39 Kg	48-51 mm	
661 lbs	0.86 lbs	1.89"-2"	

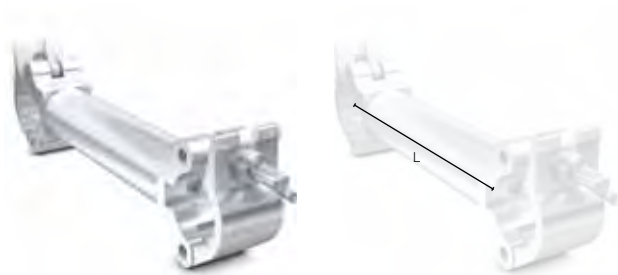

CELL 209				Extended parallel coupler
L1	L2	L3	Ø	Set of two clamps connected with aluminum tube in various lengths for parallel tube connections. Custom lengths available.
250 mm	500 mm	1000 mm	48-51 mm	
9.84"	19.69"	39.37"	1.89"-2"	

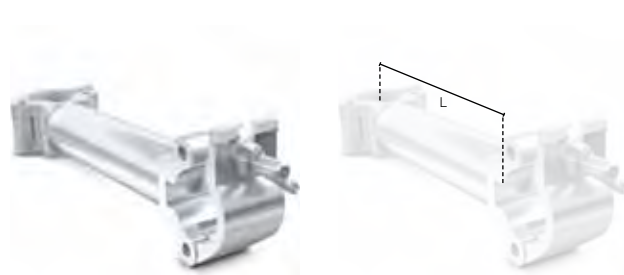

CELL 210				Extended 90° fixed coupler
L1	L2	L3	Ø	Set of two clamps connected with aluminum tube in various lengths for 90° tube connections. Custom lengths available.
250 mm	500 mm	1000 mm	48-51 mm	
9.84"	19.69"	39.37"	1.89"-2"	







CELL 211			Side clamp
<b>SWL</b>	<b>Weight</b>	<b>Ø</b>	Side clamp is ideal for using with trusses. Substitute for claw clamp.
500 Kg	0,55 Kg	48-51 mm	
1102 lbs	1.21 lbs	1.89"-2"	

CELL 212			Slim side clamp
<b>SWL</b>	<b>Weight</b>	<b>Ø</b>	Side clamp is ideal for using with trusses. Substitute for claw clamp.
300 Kg	0,35 Kg	48-51 mm	
661 lbs	0.77 lbs	1.89"-2"	



CELL 213				Horizontal attachment
<b>L1</b>	<b>L2</b>	<b>L3</b>	<b>Ø</b>	50 x 2 mm also available in custom lengths.
250 mm	500 mm	750 mm	48-51 mm	
9.84"	19.69"	29.53"	1.89"-2"	