



DMXtoDALI quad

Category

- C) DALI

Description

- Converts DMX512 to four DALI circuits with support for DT0 and DT8

Mechanical

- Mounting: DIN rail (35 mm) or surface
- Material: Polycarbonate Plastic - UL94-V0 rated
- Overall Dimensions: 88mm / 5M (W) x 90mm (H) x 62mm (D)
- Mass: 0.2 kg
- Country of manufacture: UK

Environmental

- Operating temperature: 0°C to 40°C
- Storage temperature: -10°C to +50°C
- Operating relative humidity (max): 80% non-condensing
- IP rating: IP20 indoor use only
- Certification: CE, WEEE, RoHS
- Warranty: 2-year (return to base)

Power & Electrical

- Input voltage: 9-24 VDC
- Input connector: 2-pin screw terminal (1 no.)
- Input power (max): 10W
- DC fuse: Internal resettable fuse for control electronics



Control

- Input Protocols: DMX512, DMX512 (1990), DMX512-A, RDM (E1.20 - 2010 ESTA)
- Output Protocols: DALI DT0/DT8

DMX512 Input

- Input mode: non-isolated
- Input ESD protection: 12 kV
- Electrocutation protection: Input & Loop protected against continuous connection to 425 VAC (self-healing)
- 3-pin Screw Terminal DMX Input (1 no.)
- 3-pin Screw Terminal DMX Loop (1 no.)

DALI Outputs

- Output mode: optically isolated
- 2-pin Screw Terminal DALI Outputs (4 no.)

Configuration / Indication

- RDM (Personalities, Start addresses)
- DIP Switches
- LEDs for Power / DMX / Locate / DALI / Bus power


Ordering information

- Product code: DMXtoDALI quad
- Accessories
 - PSU-24-2-FER
 - Rail-PSU-D4
 - Dali-Scope


Artistic Licence



Mounting diagram

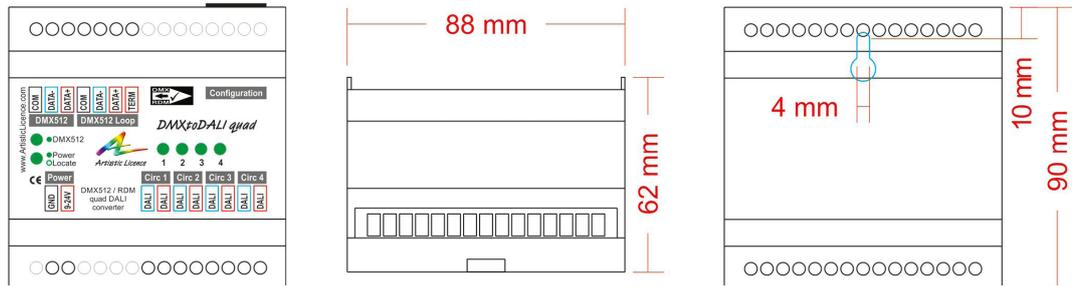

Application diagram

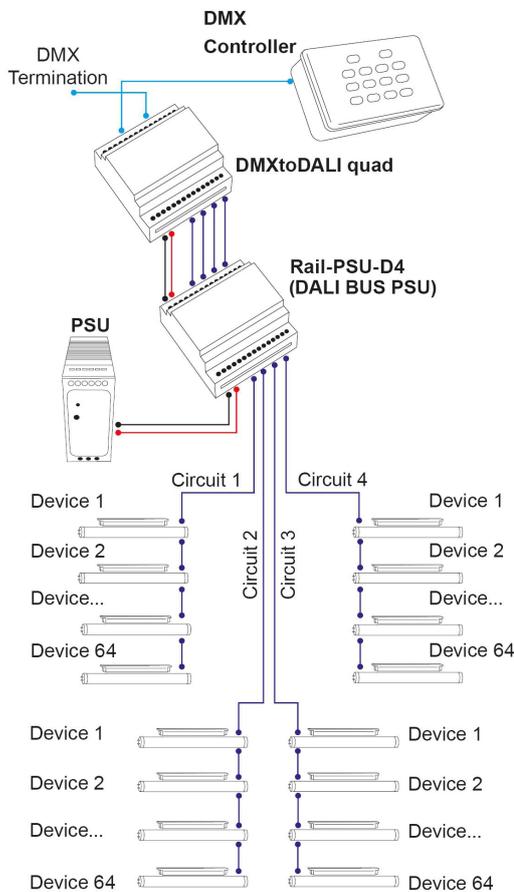

The application diagram shows DMXtoDALI quad being used to its full potential. In this example, a Rail-PSU-D4 is used to provide the DALI bus power supply.



The Mould Making Workshop
Soby Mews
Bovey Tracey
TQ13 9JG
United Kingdom

Telephone: +44 (0) 20 8863 4515
Email: sales@ArtisticLicence.com
Service: support@ArtisticLicence.com
Web: www.ArtisticLicence.com

Due to our policy of continuing product improvement specifications are subject to change without notice.

All products are covered from date of purchase by a 2-year return to base warranty.

Artistic Licence